

**Required Tools: (Not included)**


- A. Phillips screwdriver
- B. Flat head screwdriver
- C. 5 mm Allen wrench
- D. 2.5 mm Allen wrench

**⚠ WARNING**

**⚠ CAUTION:** To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

**Step 1**

Using a Phillips screwdriver, remove two (2) screws from underneath the seat towards the back of the unit.

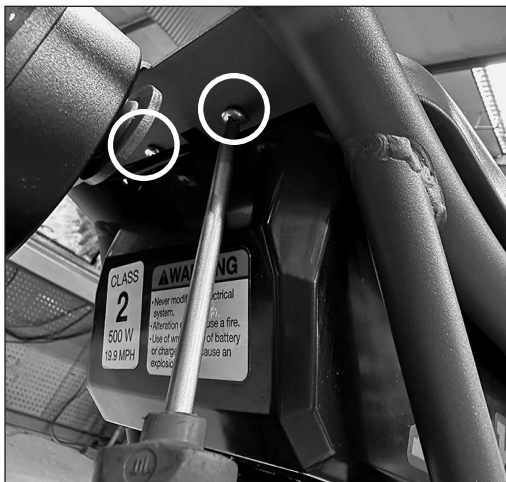
**Step 2**

Lift and pull back on the seat to remove.



### Step 3

Locate and disconnect the connector from the throttle to the controller.

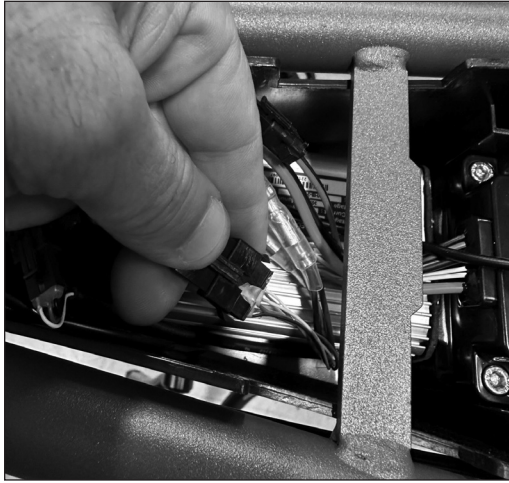

### Step 4

Using a 5 mm Allen wrench, loosen the bolt from the clamp on the brake lever and move the brake lever away from the throttle.



### Step 5

Using a 2.5 mm Allen wrench, loosen the set screw from the throttle and move the throttle away from the grip.



### Step 6

Using a flat screwdriver, insert the blade between the handlebar and the grip. Apply WD-40® or soapy water to remove the grip and throttle.



## Step 7

Reverse the steps to install the new throttle.

**ATTENTION: Charge battery 6 hours before using.**