

Required Tools: (Not included)

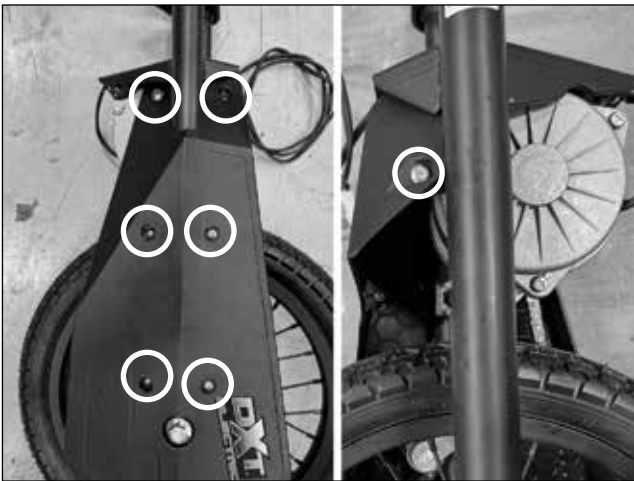
- A. Phillips screwdriver
- B. Two (2) 10 mm open wrenches

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a Phillips screwdriver, remove six (6) screws from the right side of the chain guard and one (1) screw located on the opposite side of the chain guard. Remove the chain guard.

**Step 2**

Using two (2) 10 mm open wrenches, hold the bolt from the other side, loosen and remove the lock nut that holds the chain tensioner in place, and remove it from the fork.



Step 3

Make sure the spring is properly seated on the tensioner arm and into the small hole on the fork.



Step 4

The chain tensioner roller needs to be seated on the outer side of the chain to be able to create tension to the chain.



Step 5

To install a new electric chain tensioner, reverse steps 1-4.

ATTENTION: Charge battery 12 hours before using.