

Required Tool: (Not included)

- Flathead screwdriver

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Lift the seat to access the charger port.

**Step 2**

Locate and disconnect the battery from the controller. Remove the battery to allow access to the power switch.




Step 3

Disconnect the rest of the connectors from the power switch.



Step 4

Using a flat screwdriver, remove the plastic glue around the back of the power switch. Depress the tabs from top and bottom and push the switch out.

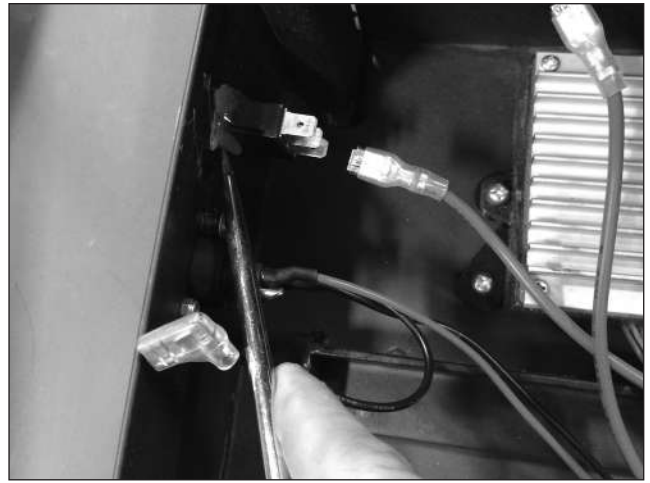

Step 5

To complete the assembly, please reverse steps 1 through 4.

Note: It is very important that you connect the wires in the following sequence. The black wire coming from the charger port can only be connected on the gold colored prong. The red wires from the controller can be connected in any sequence on the silver prongs of the power switch.

ATTENTION: Charge battery 12 hours before using.