



HOVERTRAX BRIGHTS MOTOR REPLACEMENT

PART NUMBER: W15158601030 (BLACK) AND
W15156261030 (PINK) AND W15156234030 (GREEN)

Required Tools: (Not included)


- 4 mm Allen Wrench
- 10 mm Open-End Wrench
- Phillips Screwdriver

WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch **OFF** and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.


Step 1

Turn the Hovertrax upside down. Use a Phillips screwdriver to remove all the screws on the left and right lower covers.

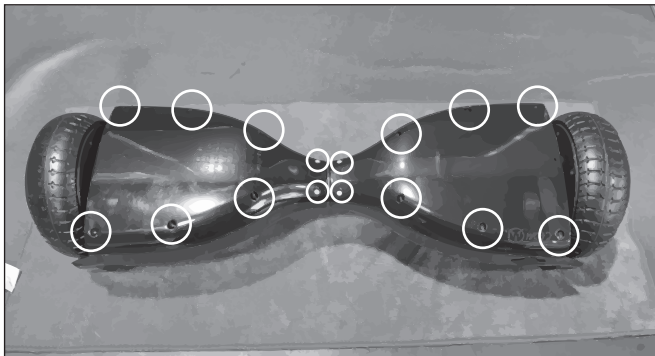


Step 2

Find the power wire and disconnect the connector.

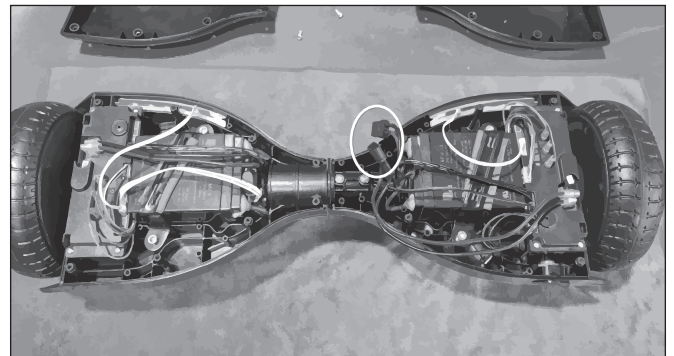


Step 3

Right controller: Disconnect all connectors shown in the picture.

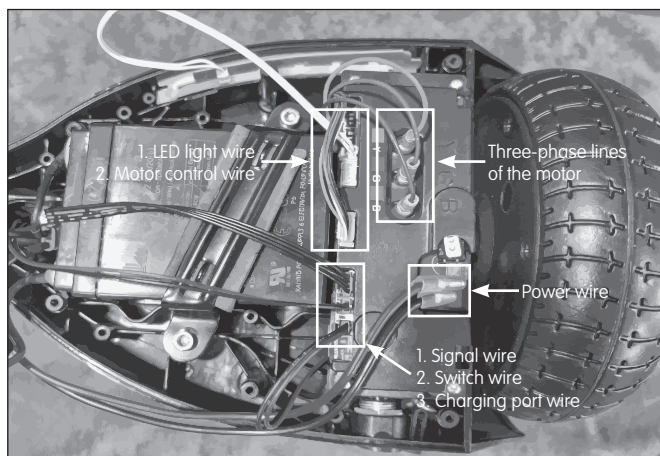


Step 4

Left controller: Disconnect all connectors shown in the picture.

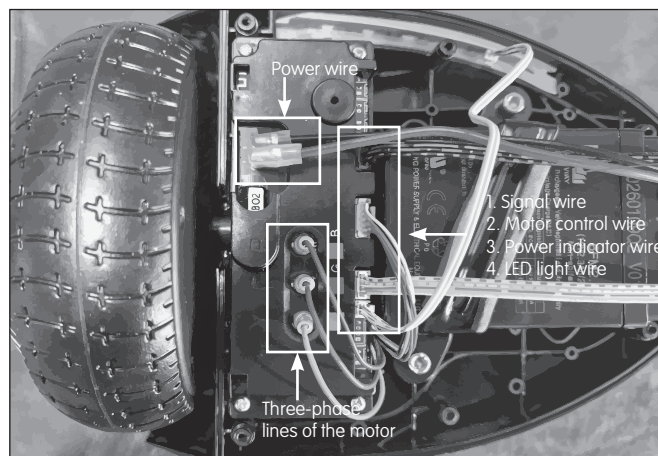


Step 5

Use a Phillips screwdriver to remove all the screws on the left/right controller.

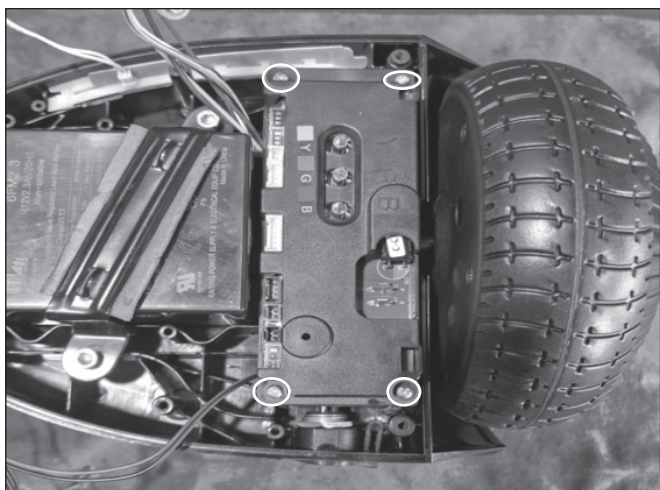


Step 6

Use a 4mm Allen wrench to loosen the screws on the battery brackets.

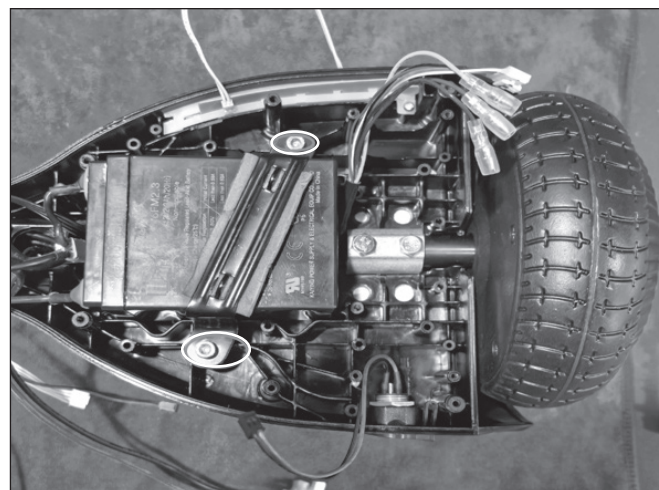

Step 7

Remove the right battery and set it aside. Use a 10mm open-end wrench to loosen the screws on the motor shaft.

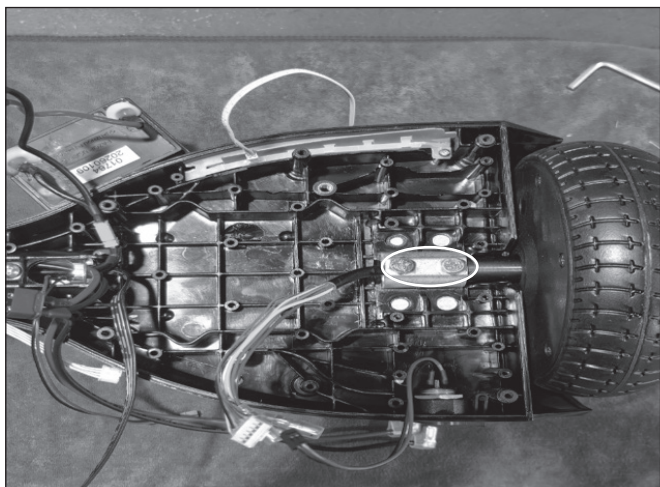

Step 8

Insert a new motor, then reverse steps 1 through 7.

ATTENTION: Charge battery 12 hours before using.