

Required Tools: (Not included)


- 10 mm Open-End Wrench
- 15 mm Socket Wrench

! WARNING


! CAUTION: To avoid potential shock or other injury, turn power switch **OFF** and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Use a 15mm socket wrench to loosen the nuts on both sides of the rear axle. Then, use a 10mm open-end wrench to loosen the chain tensioner nut. Push the wheel forward to release the tension and remove the chain from the rear sprocket.

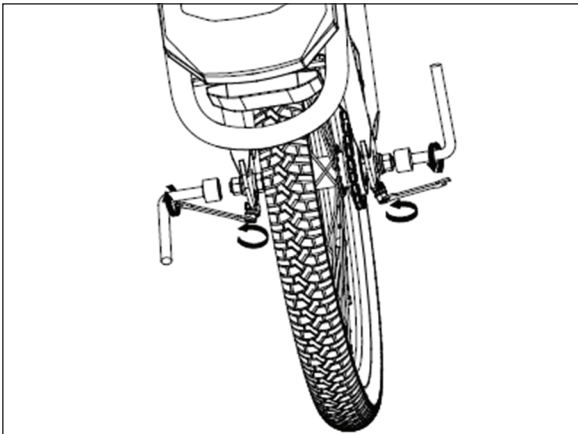
**Step 2**

Remove the rear V-brake conduit.

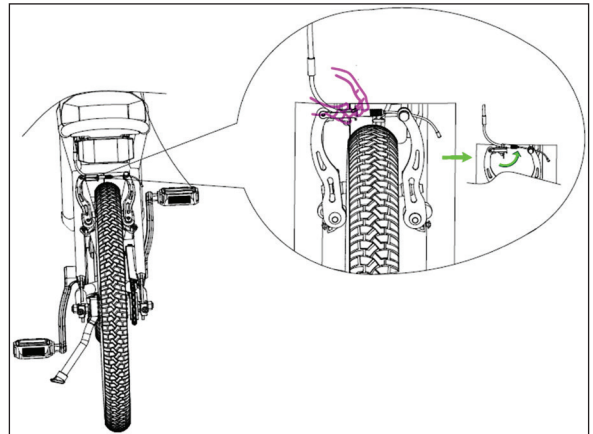

Step 3

Remove the rear wheel.

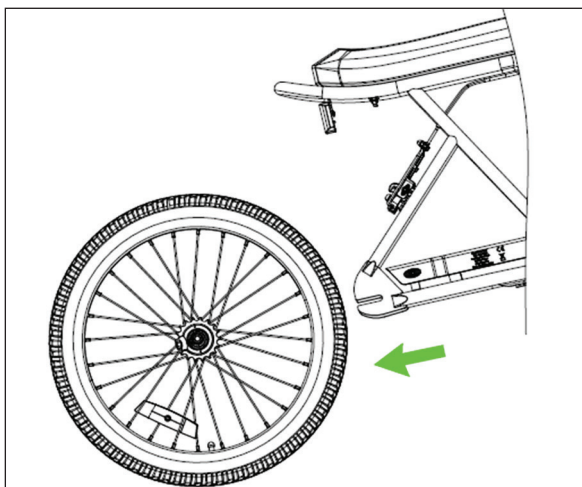

Step 4

Insert a new rear wheel, then reverse steps 1 through 3.

ATTENTION: Charge battery 12 hours before using.