

Required Tools: (Not included)

A. Phillips screwdriver
B. 5 mm Allen wrench

C. Pick

⚠WARNING

⚠CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before performing any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a Phillips screwdriver, remove four (4) screws from the battery cover on the side of the product with the power switch. Remove battery cover and set aside.




Step 2

Using a Phillips screwdriver, remove six (6) screws from the battery cover on the side of the product with the charger port. Being careful not to damage the wires, remove the battery cover and set aside.



Step 3

Locate and disconnect the motor connector from the controller.

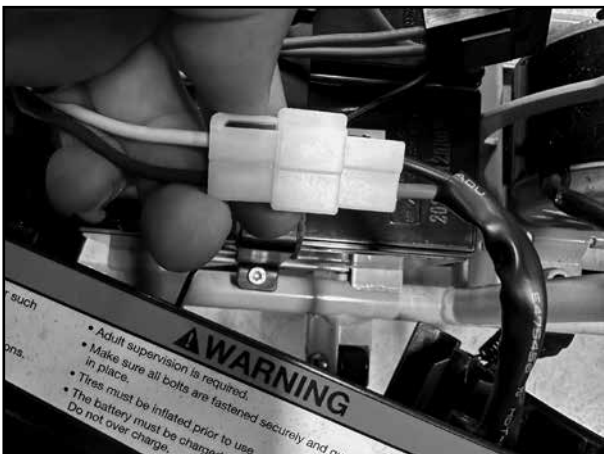

Step 4

Using a Phillips screwdriver, remove five (5) screws from the chain guard. Remove the chain guard from the unit and set aside.




Step 5

Using a 5mm Allen wrench, loosen up and remove the four (4) hex bolts that hold the motor onto the frame.



Step 6

Using a pick or a pointy object, depress the tabs from the prongs inside the motor connector and pull the wires from the connector.

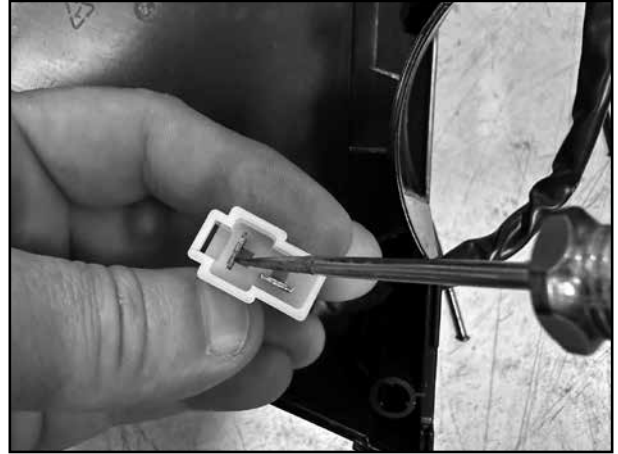

Step 7

To install new motor, reverse steps 1-6.

Attention: Charge battery 12 hours before using.