

Required Tools: (Not included)


- Two (2) 8 mm Open Wrenches
- 10 mm Open Wrench
- Two (2) 15 mm Open Wrenches
- Phillips Screwdriver

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a Phillips screwdriver, remove two screws located on the side of the chain guard.

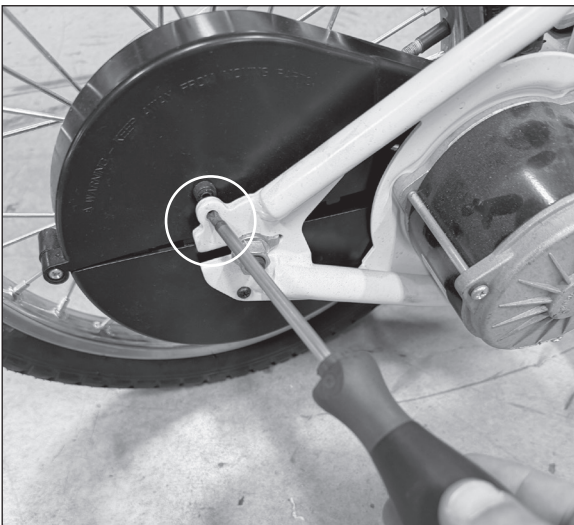**Step 2**

Remove the screw located behind the motor, then remove the chain guard.



Step 3

Using a 10mm open wrench, loosen the lock nut that holds the brake cable in place.



Step 4

Using two 8mm open wrenches, loosen and remove the lock nut and bolt that holds the brake anchor plate onto the frame.




Step 5

Using two 15mm open wrenches, loosen the lock nuts on the rear axle. Slide the wheel back and out from the frame.



Step 6

Note the sequence of the hardware for reassembly.

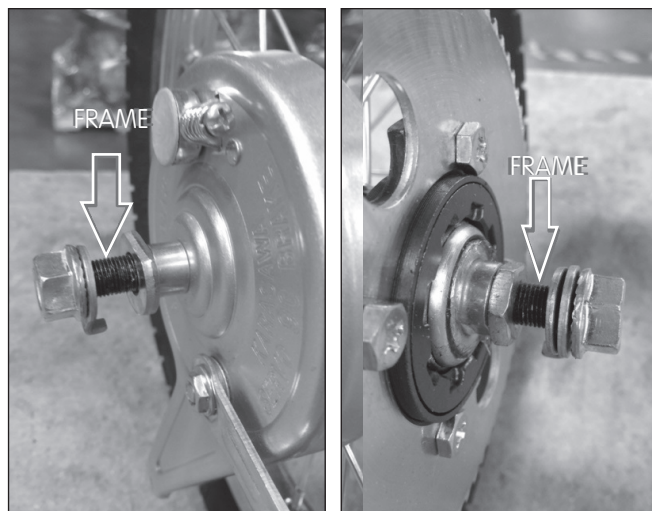

Step 7

Insert a new rear wheel, then reverse steps 1 through 6.

ATTENTION: Charge battery 12 hours before using.