

**Required Tools: (Not included)**


- 5mm Allen Wrench
- Wire Cutter
- Flat Screwdriver

**⚠ WARNING**

**⚠ CAUTION:** To avoid potential shock or other injury, turn power switch **OFF** and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

**Step 1**

Carefully lift and rest the unit on the back wheels.

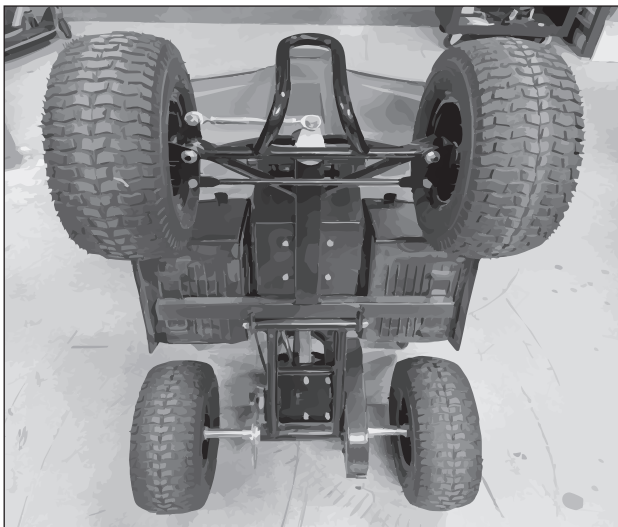
**Step 2**

Using wire cutters, cut and remove the zip tie that keeps all of the wires together. Locate and disconnect the brake lever connector from the controller.



### Step 3

Using a 5mm Allen wrench, loosen the set screw on the brake lever. Move the lever away from the hand grip.

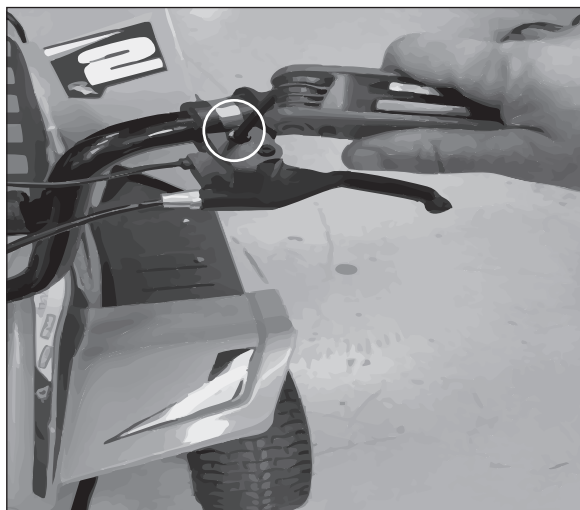


### Step 4

Insert a flat screwdriver between the handlebar and the grip. Apply a few drops of WD40 or soapy water to easily remove the grip from the handlebar.




### Step 5

Untangle the plastic wrap from the brake lever cable and remove.

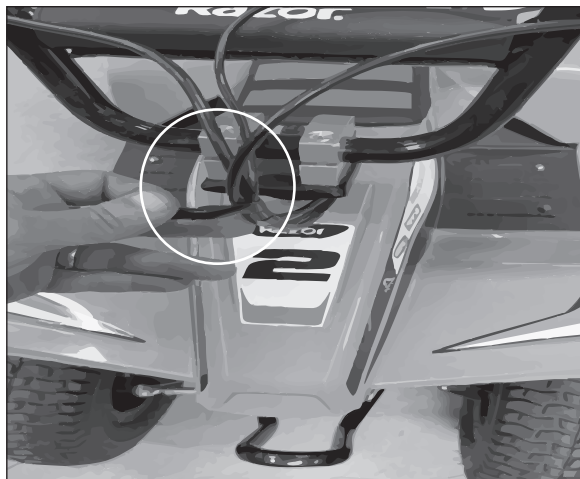

### Step 6

Using a 5mm Allen wrench, loosen the bolt that holds the brake cable onto the caliper, then pull the cable out from the caliper.

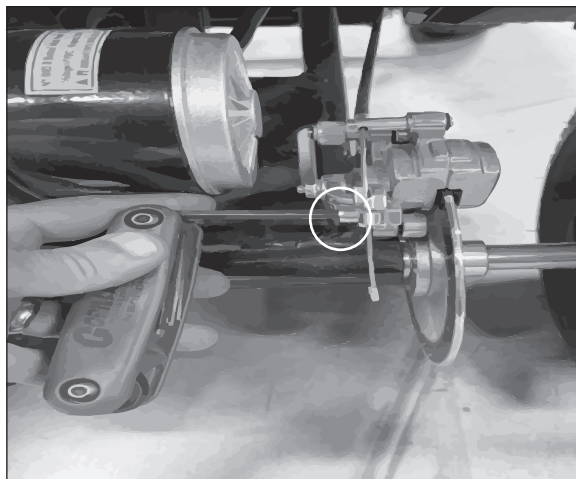

### Step 7

Insert a new brake lever, then reverse steps 1 through 6.

**ATTENTION: Charge battery 12 hours before using.**