

Required Tool: (Not included)

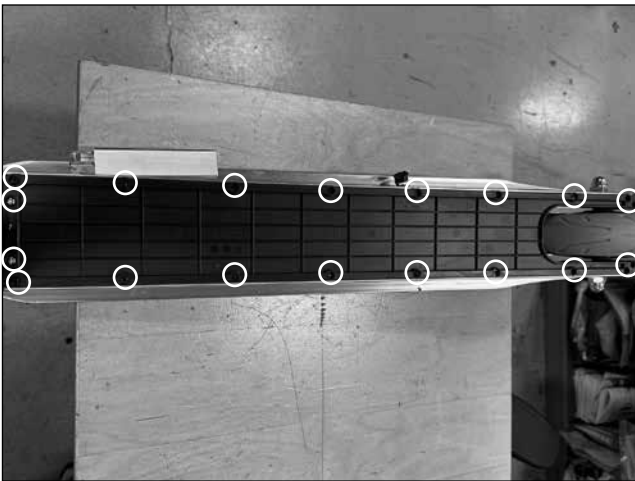
- Phillips Screwdriver

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Flip the unit over. Using a Phillips screwdriver, remove twenty (20) screws from the bottom of the unit.

**Step 2**

Lift and remove the battery cover from the unit.



Step 3

Locate and disconnect both lights from the controller.



Step 4

Using a Phillips screwdriver, loosen and remove the screws that hold the lights in place. Pull both lights out from the frame.



Step 5

To install new taillight, reverse steps 1-4.

ATTENTION: Charge battery 8 hours before using.