



**POWER CORE 90 THROTTLE
REPLACEMENT INSTRUCTIONS
PART# W13111401043**

Required Tools: (Not included)

A. Phillips screwdriver
B. 3 mm Allen wrench

C. Flat head screwdriver

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before performing any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.


Step 1

Using a Phillips screwdriver, remove the four (4) screws on the deck cover (circled in the image below). Remove deck cover and set aside.




Step 2

Using a Phillips screwdriver, remove the two (2) screws on the battery holder (circled in the image below). Remove battery holder and set aside.

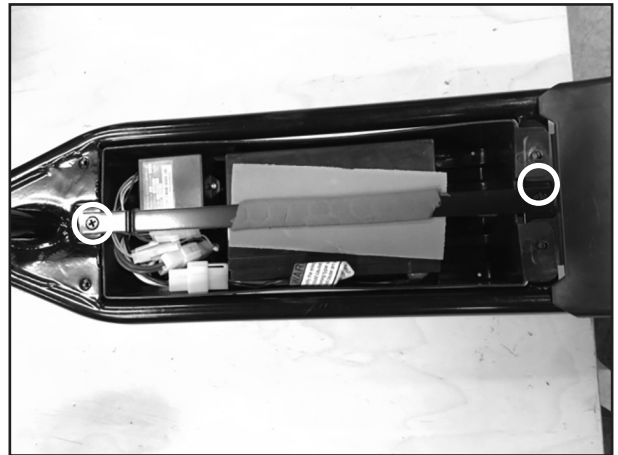

Step 3

Disconnect the battery from the controller.

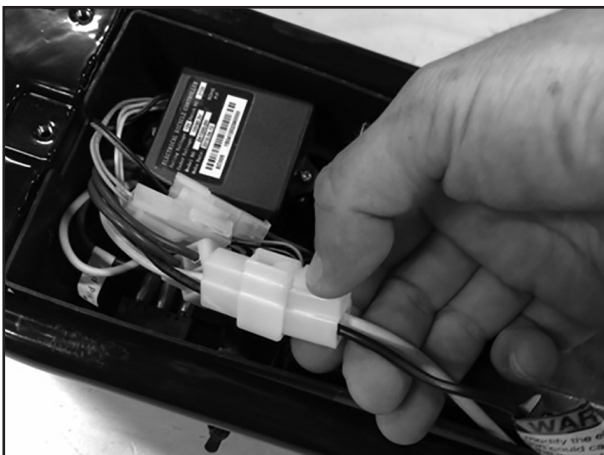

Step 4

Remove the battery from the tray to give you access to the controller. Set battery aside.




Step 5

Using a Phillips screwdriver, remove the two (2) screws that attach the controller to the tray (circled in the image below). Remove controller and set aside.




Step 6

Using a Phillips screwdriver, remove the two (2) screws from the plastic piece that holds the throttle cable to the battery tray (circled in the image below). Set plastic piece aside.

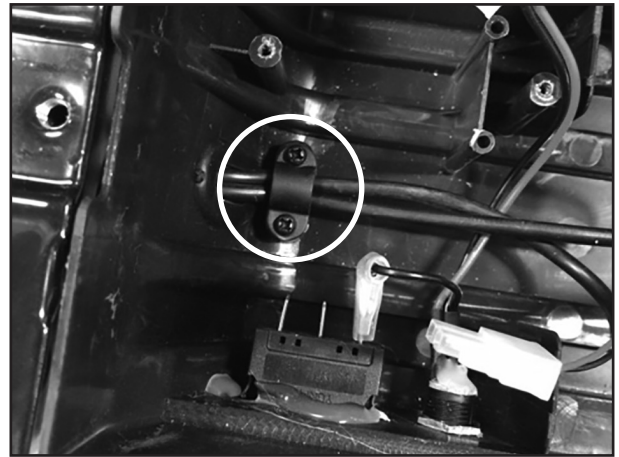

Step 7


Disconnect the throttle from the control module. Disconnect the throttle from the control module. Follow the throttle cable and cut the zip tie. Remove the cable wrap. Gently pull the throttle cable through the hole in the battery tray.

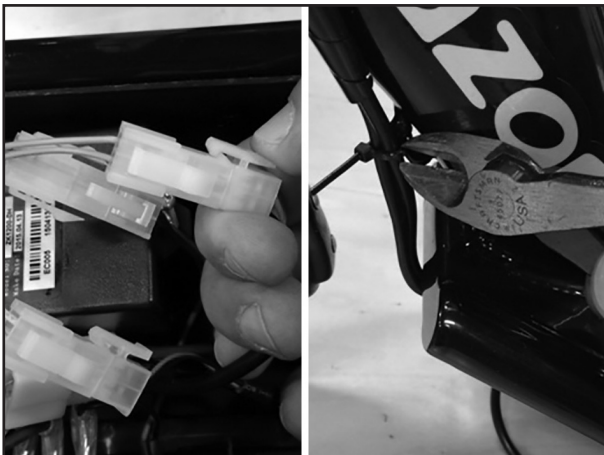

Step 8

Using a 3 mm Allen wrench, loosen the throttle screw but do not remove it. Move the throttle away from the grip.



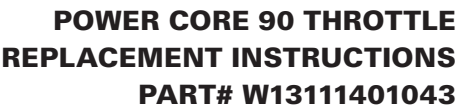

Carefully wedge a flat head screwdriver under the edge of the handlebar grip and add a small amount of lubricant or water and remove the grip. Remove the grip and set aside.



Reverse the procedures

- Put the new throttle in place and secure it, clean the grip from any water or lubricant and re-install.
- Re-connect the throttle to control module.
- Place battery back inside the tray and re-attach with two (2) screws.
- Re-attach deck cover with six (4) screws.

Attention: Charge battery 12 hours before using.