

Required Tools: (Not included)

- 4mm Allen Wrench

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch **OFF** and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Loosen and remove the butterfly lock nut from under the seat.

**Step 2**

Lift and pull the seat back to remove it from the unit. Then, using your key, open the battery cover.



Step 3

Using a 4mm Allen wrench, loosen and remove the two bolts that hold the battery cover and key switch onto the frame. Move the cover aside.



Step 4

Locate and disconnect the throttle from the wire harness. The connectors are labeled.




Step 5

Unwind the cable wrap from the cables.



Step 6

Using a 4mm Allen wrench, loosen two bolts on the throttle housing and slide the throttle off from the handlebar.

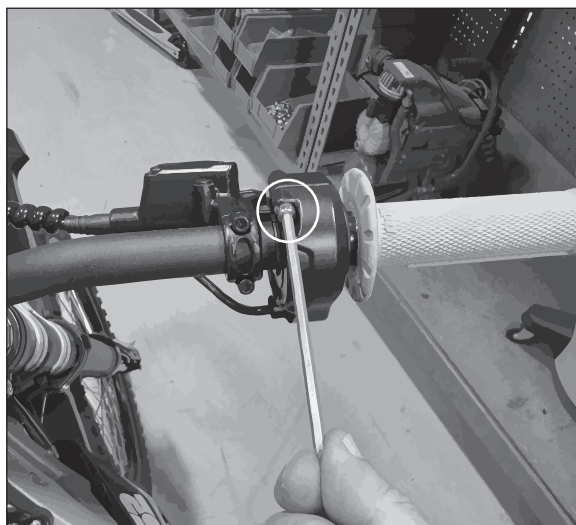

Step 7

Insert new throttle, then reverse steps 1 through 6.

ATTENTION: Charge battery 12 hours before using.