

Required Tools: (Not included)

- A. Phillips screwdriver
- B. 5 mm Allen wrench

⚠WARNING

⚠CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before performing any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

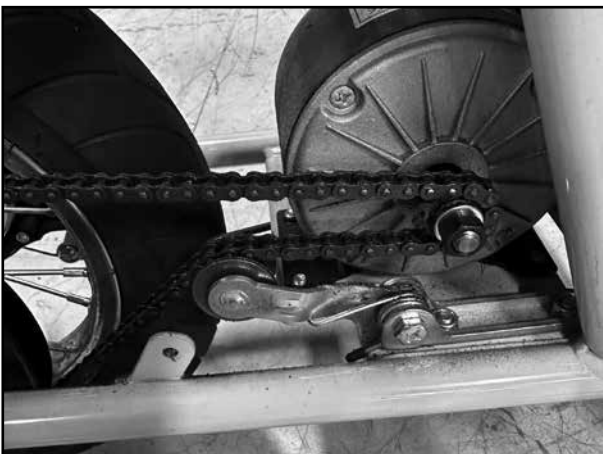
Using a Phillips screwdriver, remove five (5) screws from the chain guard and remove the chain guard and set aside.

**Step 2**

Using a 5mm Allen wrench, loosen up and remove the two (2) hex bolts that hold the chain tensioner onto the frame.

**Step 3**

When installing the new chain tensioner, please make sure the tensioner is pushing up against the chain.

**Step 4**

To install new chain tensioner, reverse steps 1-3.

Attention: Charge battery 12 hours before using