MX350/MX400 (VERSION 37+)/ SX350 (VERSION 1+) CHAIN TENSIONER REPLACEMENT

PART # W15128050079

Required Tools: (Not included)


A. Phillips screwdriver
B. Flathead screwdriver
C. 5 mm Allen wrench

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.


Step 1

Using a Phillips screwdriver, remove the five (5) screws that hold the chain guard in place. Remove the chain guard and set it aside.

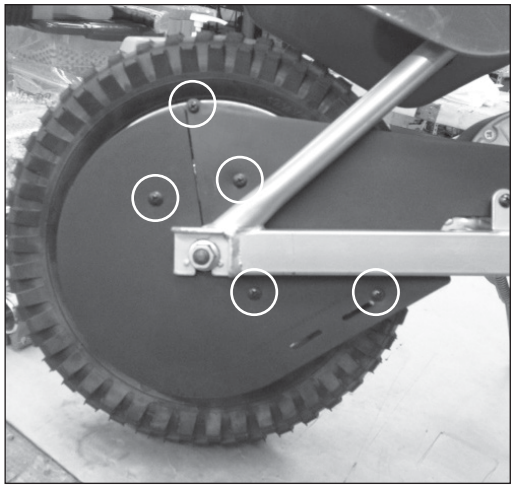


Step 2

Using a flathead screwdriver, remove the spring from the tension arm.

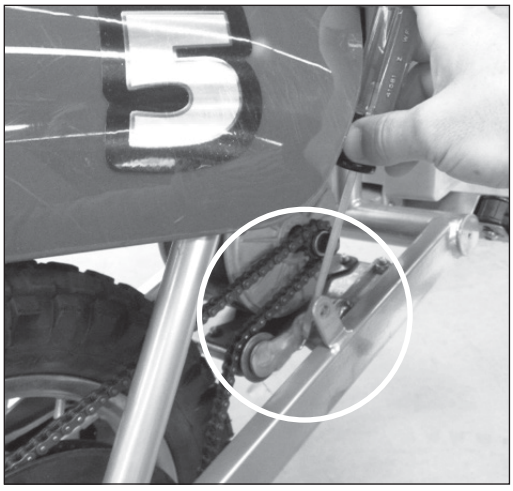

Step 3

Flip the unit on its side. Using a 5 mm Allen wrench, remove the two (2) hex bolts that hold the tensioner onto the frame and remove it.

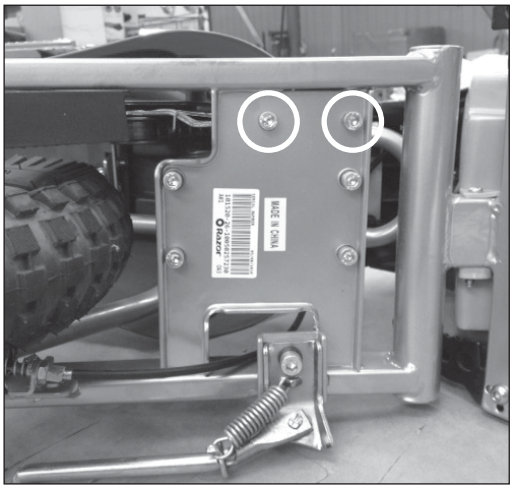

Step 4

Replace the old tensioner with a new one.



Step 5

Reverse the steps to install the new chain tensioner.

ATTENTION: Charge battery 12 hours before using.