



**HOVERTRAX BRIGHTS
CHARGING PORT REPLACEMENT**
PART NUMBER:W15156234106

Required Tools: (Not included)


- Open-End Wrench
- Phillips Screwdriver

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch **OFF** and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.


Step 1

Turn the Hovertrax upside down. Using a Phillips screwdriver, loosen and remove eight (8) screws that secure the right lower cover, then remove the cover.

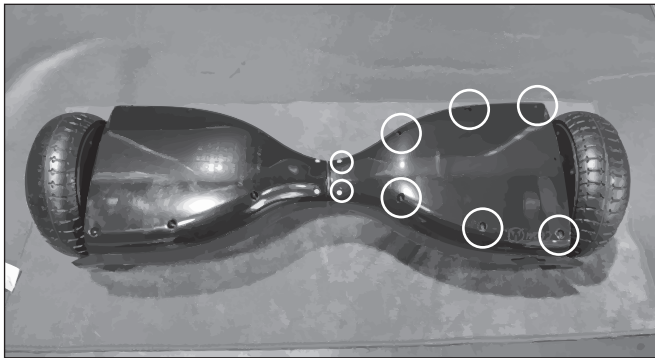


Step 2

Carefully cut the zip tie that holds the wires together.

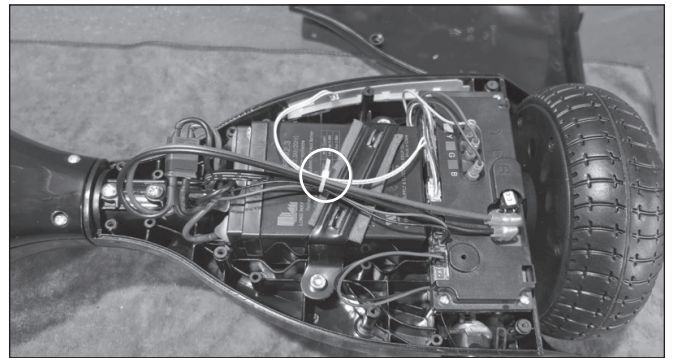


Step 3

Find the power wire and disconnect the connector.

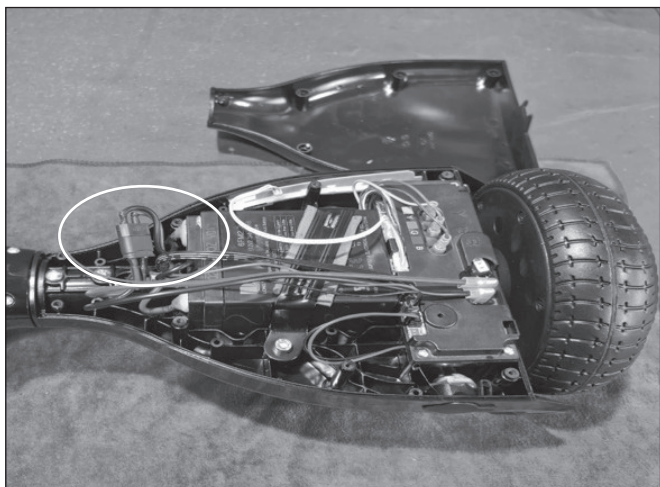


Step 4

Using a Phillips screwdriver, remove four (4) screws from the right controller.

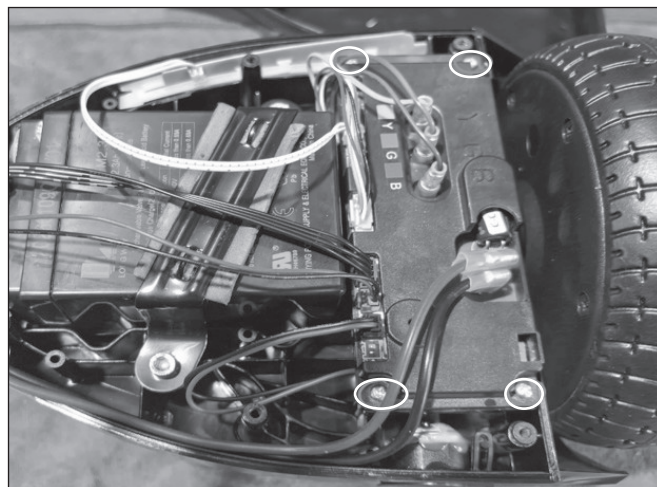


Step 5

Disconnect the plug of the charging port from the controller.

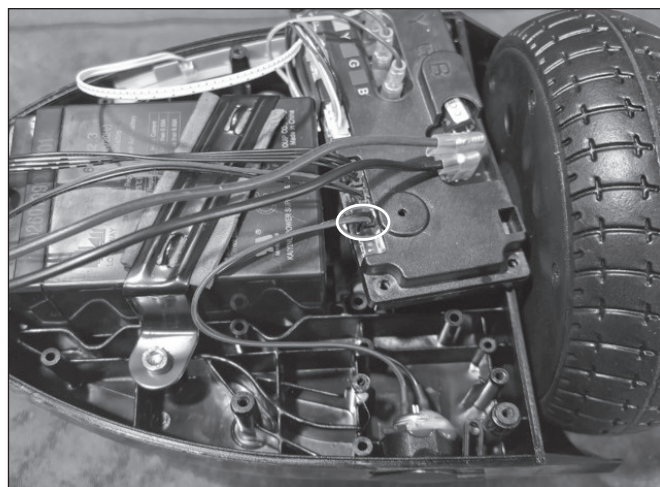


Step 6

Remove the hot glue around the charging port.

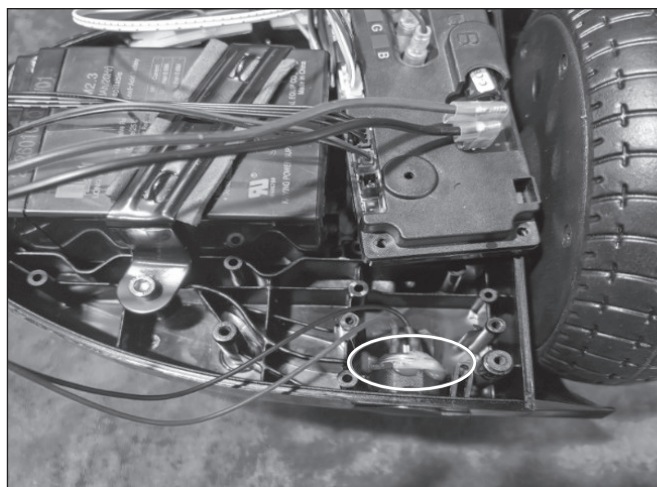

Step 7

Use an open-end wrench to loosen the nut on the charging port.

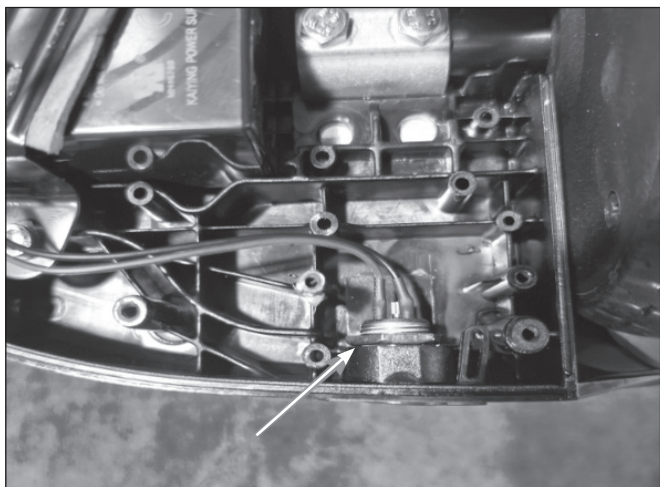

Step 8

Insert a new charging port, then reverse steps 1 through 7.

ATTENTION: Charge battery 12 hours before using.