

Required Tools: (Not included)

- 5mm Allen Wrench
- 6mm Allen Wrench
- 10mm Open Wrench
- Wire Cutters
- Phillips Screwdriver

! WARNING

! CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Place the unit upright, resting on the kickstand, and turn the power switch off. Lift the seat compartment.

**Step 2**

Using a Phillips screwdriver, remove the four screws that hold the seat compartment onto the frame.




Step 3

Lift and remove the seat compartment from the unit.




Step 4

Using a Phillips screwdriver, remove the three screws that hold the power switch cover onto the frame. Carefully lift and remove the cover without pulling or damaging the wires.

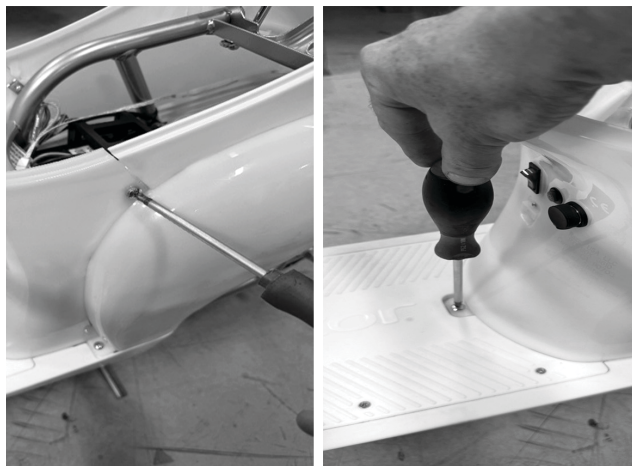


Step 5

Locate and disconnect the LED switch from the controller and the LED regulator. Using wire cutters, cut the zip tie that holds the LED regulator onto the controller.

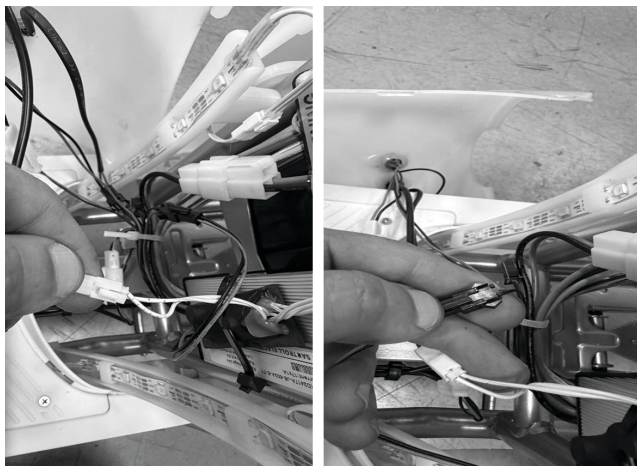

Step 6

Using a Phillips screwdriver, remove two screws from the rear fairing. Using a 5mm Allen wrench and a 10mm open wrench, remove the bolt and lock nut that hold the fairing onto the frame, then remove the fairing.

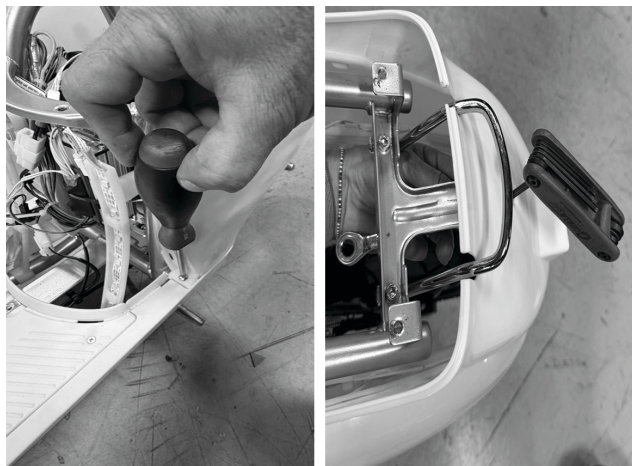


Step 7

Using a 6mm Allen wrench, loosen the steering bolt and lift the handlebar off the unit.



Step 8

Using a Phillips screwdriver, remove all screws from the front fairing cover and the foot rest cover, then remove both covers from the unit.

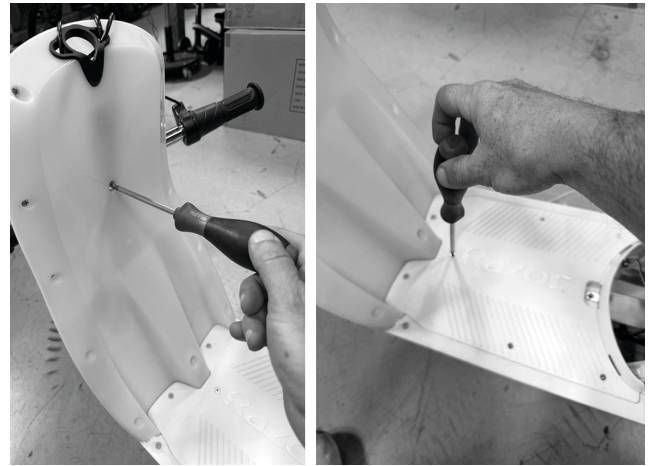


Step 9

Some of the brackets are held by screws, so move the LED strip slightly to the side. Using a Phillips screwdriver, remove all screws.



Step 10

Remove all LED brackets from the unit.

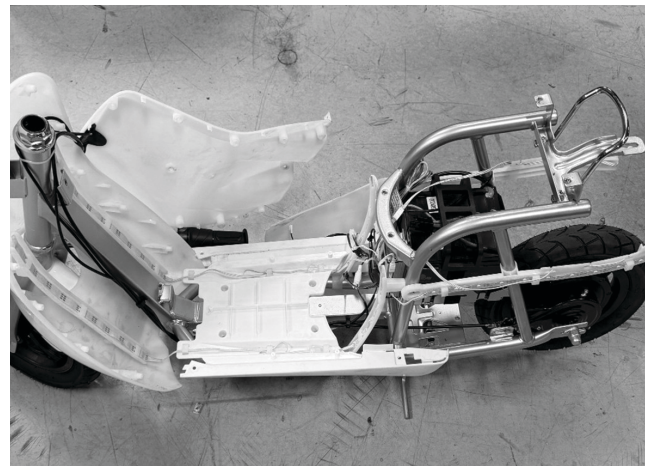

Step 11

Reverse the steps to install a new LED kit.

ATTENTION: Charge battery 12 hours before using.