

Required Tools: (Not included)


- Phillips Screwdriver

⚠ WARNING


⚠ CAUTION: To avoid potential shock or other injury, turn power switch **OFF** and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a Philips screwdriver, remove the six (6) screws on the left side battery cover and remove the cover.

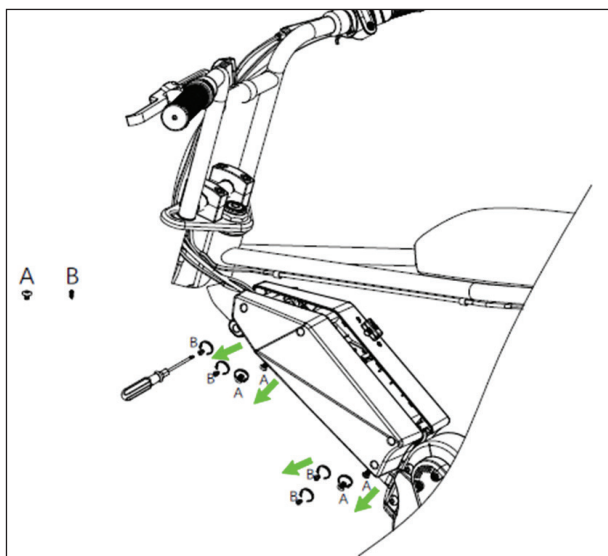
**Step 2**

Locate and disconnect the battery from the controller and remove the battery from the unit.

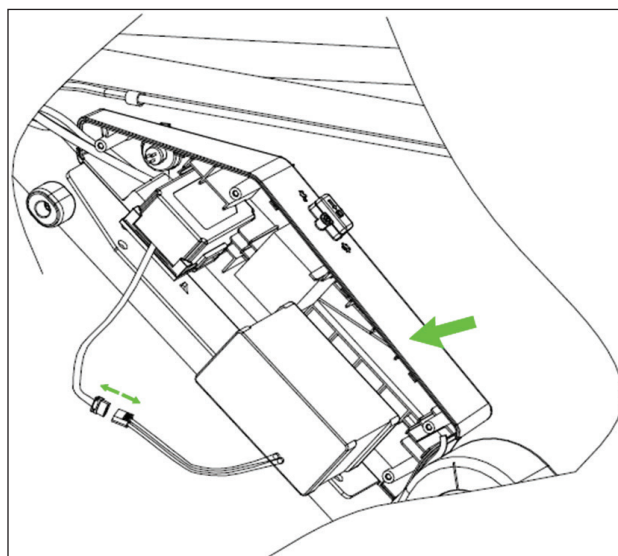


Step 3

Place the new battery into the battery tray and reconnect the battery to the controller.

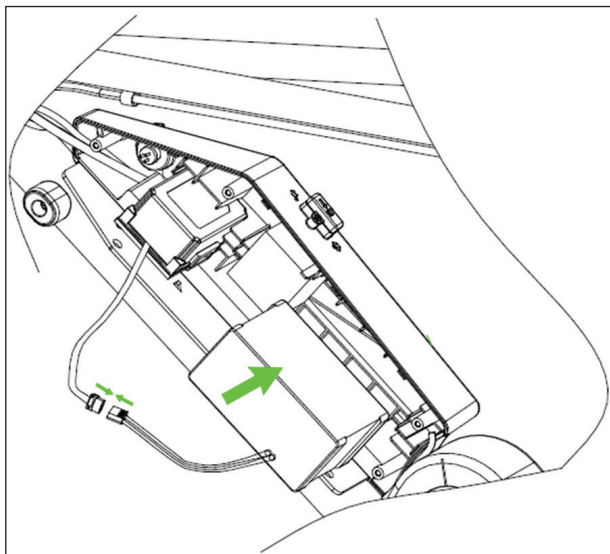

Step 4

Reposition the left cover and secure with six (6) screws.

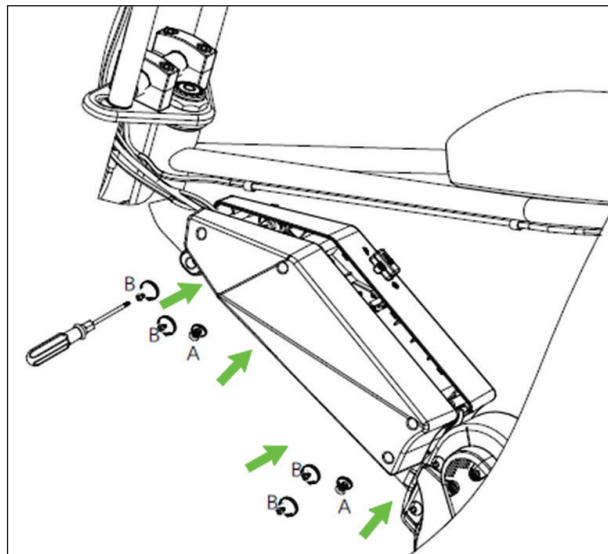

ATTENTION: Charge battery 12 hours before using.