



CRAZY CART XL
MOTOR REPLACEMENT INSTRUCTIONS
PART # W25143401030

Required Tools: (Not included)

- A. 5 mm Allen wrench
- B. Phillips screwdriver
- C. 4 mm Allen wrench
- D. 10 mm Open wrench

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.


Step 1

Lift the seat.



Step 2

Use a 5 mm Allen wrench to remove the two (2) hex bolts that keep the seat attached to the frame.

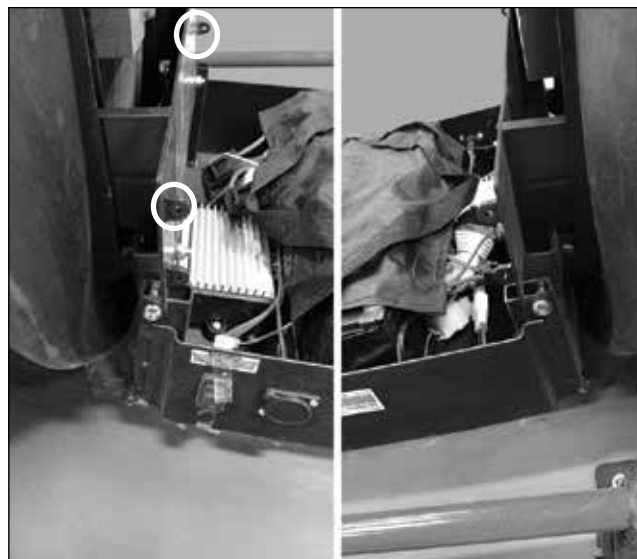

Step 3

Using a Phillips screwdriver, remove seven (7) screws from the motor cover.




Step 4

Using a 4 mm Allen wrench, remove two (2) hex bolts on the bottom of the motor cover. Remove the cover from the frame.



Step 5

Locate and disconnect the motor from the controller. Using a small pointy object, depress the pins inside the white plastic connector and remove it.

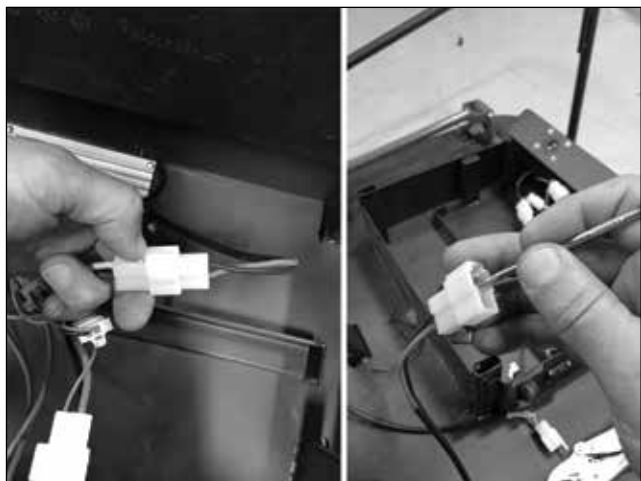


Step 6

Cut all the zip-ties that hold the wires to the frame.



Step 7

Using a 10 mm open wrench, remove the four (4) bolts that attach the motor to the front fork. Remove the chain from the motor sprocket. Slide the wires through the opening on the front fork to remove.

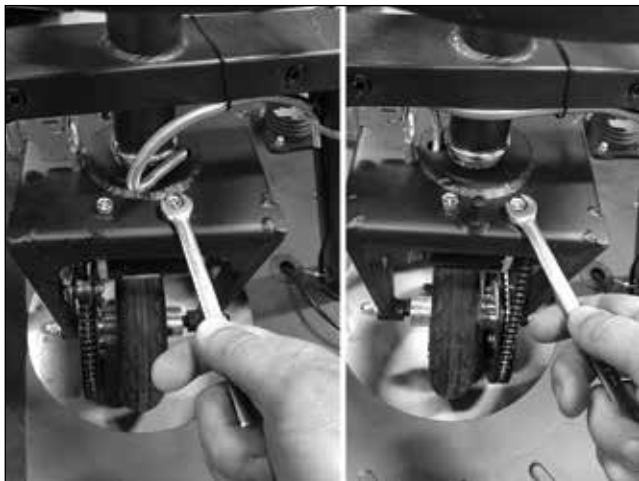

Step 8

To install a new motor, reverse steps 1-7.

ATTENTION: Charge battery 12 hours before using.