

**Required Tools: (Not included)**


- 4mm Allen wrench
- Phillips Screwdriver
- Two (2) 21mm wrenches

**⚠ WARNING**

**⚠ CAUTION:** To avoid potential shock or other injury, turn power switch **OFF** and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

**Step 1**

Using a 4mm Allen wrench, remove two (2) screws located under the seat at the back of the unit.

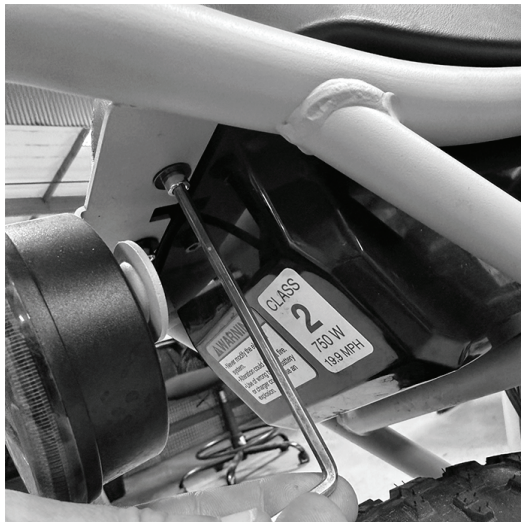
**Step 2**

Lift the seat and pull it back to remove it.




### Step 3

Locate the motor connectors and disconnect them from the controller.

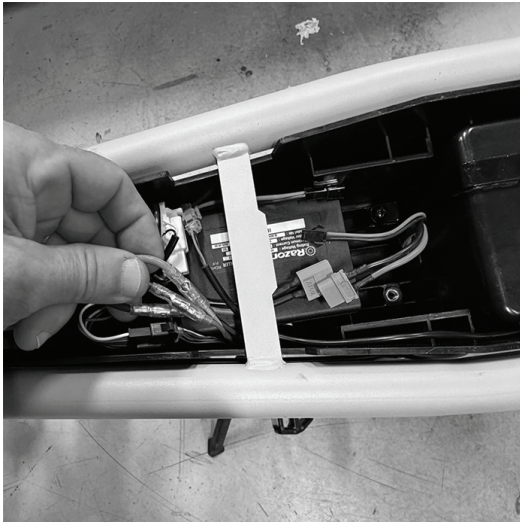


### Step 4

Using a Phillips screwdriver, remove the three (3) screws that hold the chain guard in place, then remove the chain guard.

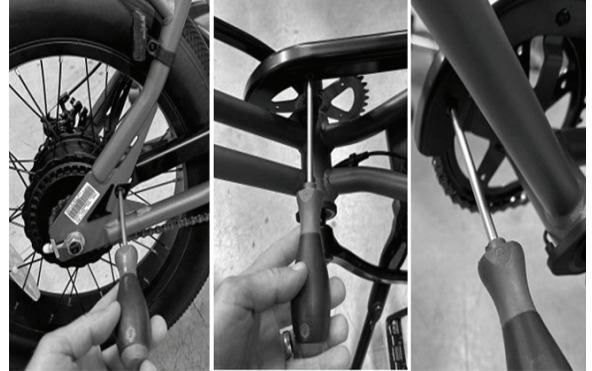


### Step 5

Using a 4mm Allen wrench, loosen the bolts on the chain tensioners at both sides of the frame.

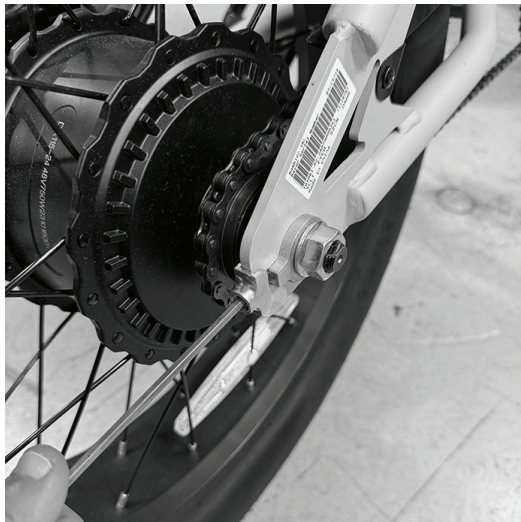

### Step 6

Using two (2) 21mm wrenches, loosen the lock nuts on the rear axle.

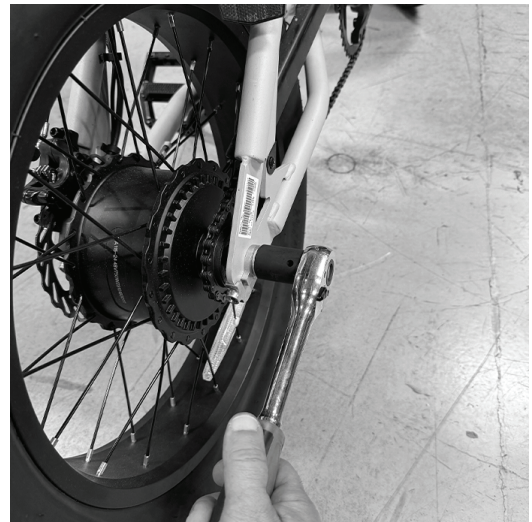

## Step 7

Push the wheel forward to loosen the chain, then remove the chain from the front sprocket followed by the rear. Once the chain is off both sprockets, slide the wheel back and remove it from the frame.



## Step 8

Insert a new rear wheel/motor, then reverse steps 1 through 7.

**ATTENTION: Charge battery 12 hours before using.**