

Required Tools: (Not included)

- A. Phillips screwdriver
- B. 4 mm Allen wrench

⚠ WARNING


⚠ CAUTION: To avoid potential shock or other injury, turn power switch **OFF** and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a Phillips screwdriver remove four (4) screws from the power switch side of the battery cover.

**Step 2**

Remove six (6) screws from the charger port side of the battery cover. Remove the battery covers being careful not to damage the wires. Set battery covers aside.

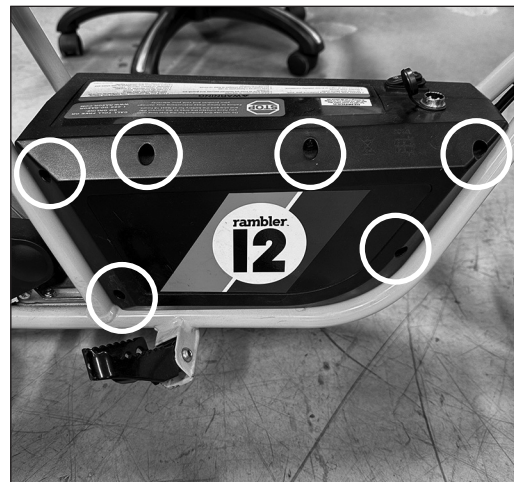

Step 3

Locate and disconnect the battery from the controller.



Step 4

Using a 4 mm Allen wrench, loosen and remove two (2) hex bolts from the battery bracket. Using both hands, lift and remove the battery from the frame.



Step 7

Reverse the steps to install the new battery.

ATTENTION: Charge battery 12 hours before using.