

Required Tools: (Not included)


- A. 5 mm Allen wrench
- B. 4 mm Allen wrench
- C. 3 mm Allen wrench
- D. Flat screwdriver

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch **OFF** and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a 5 mm Allen wrench, remove the hex bolt next to the power switch and two (2) bolts from under the seat. Remove the seat fairing.

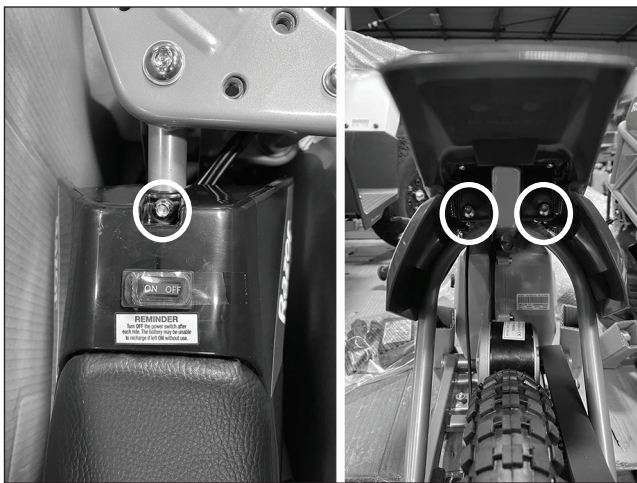
**Step 2**

Carefully disconnect the three (3) wires that connect to the power switch.



Step 3

Using a long 4 mm Allen wrench, remove eight (8) hex bolts from the battery cover.

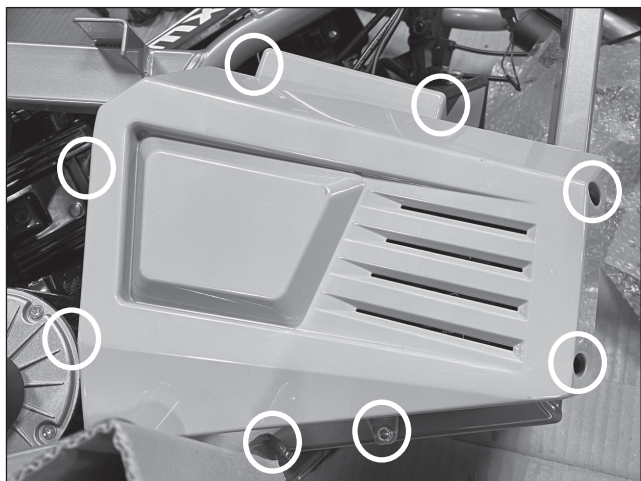

Step 4

Locate and disconnect the throttle from the controller.



Step 5

Remove the plastic spiral that keeps the wires together and save it for reinstallation.



Step 6

Using a 3 mm Allen wrench, loosen the set screw from the throttle. Move the throttle away from the grip.



Step 7

Insert the blade of a flat screwdriver between the handlebar and the grip. Apply WD-40 or a few drops of soapy water to help remove the grip and throttle from the handlebar.



Step 8

To install a new throttle, reverse steps 1-7.

Note: When reconnecting the power switch, make sure to connect the black wire on the gold colored prong and the two red wires on the silver colored prongs.

ATTENTION: Charge battery 12 hours before using.