

**Required Tools: (Not included)**

- A. Phillips screwdriver
- B. Flat head screwdriver
- C. Needle nose pliers
- D. Pick or Thin screwdriver

**⚠ WARNING**


**⚠ CAUTION:** To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

**Step 1**

Using a Phillips screwdriver, remove four (4) screws from the power switch side of the battery cover.


**Step 2**

Using a Phillips screwdriver, remove six (6) screws from the charger port side of the battery cover. Remove the battery covers being careful not to damage the wires. Set battery covers aside.

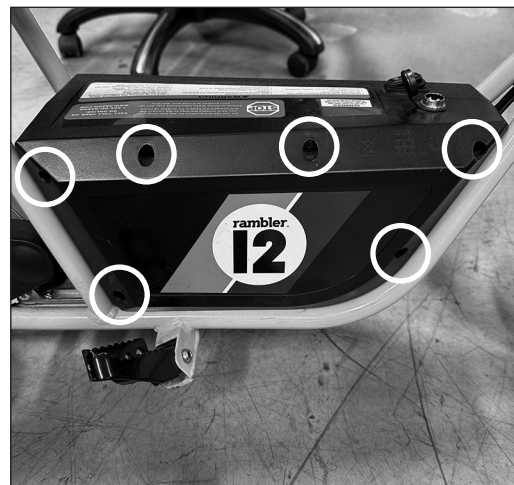

### Step 3

Locate and disconnect the charger port connector from the controller and black wire from the power switch.

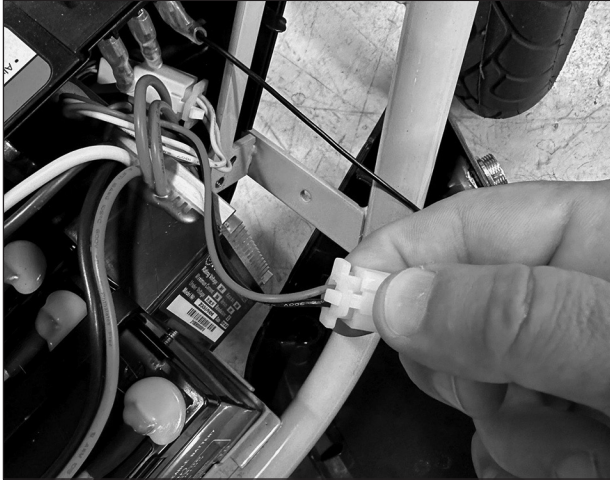


### Step 4

Using a flat screwdriver remove the glue at the back of the charger port and using long needle pliers remove the lock nut that holds charger port in place.



## Step 5

Using a pick or thin screwdriver depress the tabs from the prongs inside the connector and pull the wires out.

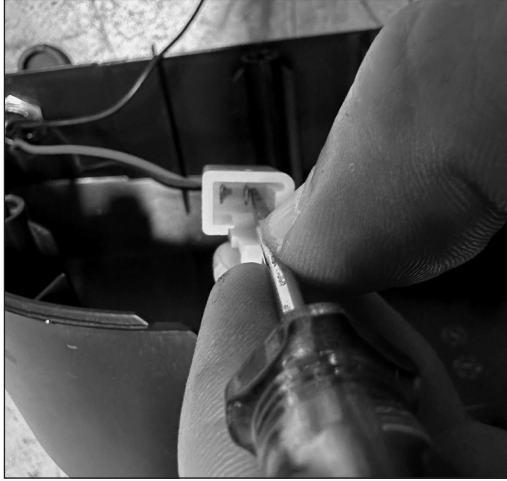

## Step 6

When reconnecting the charger port make sure the wires on the connector match the controller connector and that the single black wire connects only on the gold colored prong of the power switch. Reverse the steps for installation.

**ATTENTION: Charge battery 12 hours before using.**