



POWER CORE E90
CHARGER PORT REPLACEMENT INSTRUCTIONS
PART # W13111402106

Required Tools: (Not included)

- A. Phillips screwdriver
- B. Flat screwdriver
- C. Long needle pliers
- D. Small pick

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch **OFF** and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.


Step 1

Using a Phillips screwdriver, remove six (6) screws from the deck. Remove the deck and set aside.



Step 2

Using a Phillips screwdriver, remove two (2) screws from the battery holder. Remove the battery holder and set aside.

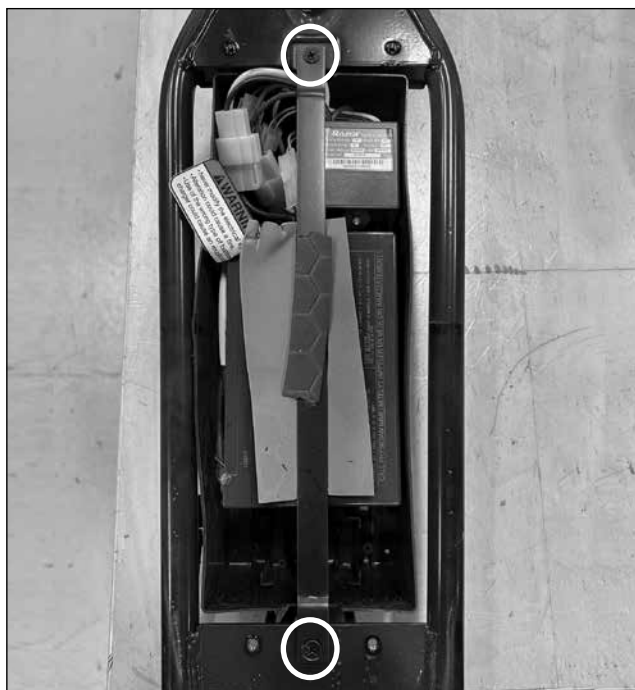


Step 3

Disconnect the battery from the controller.




Step 4

Locate and disconnect the charger port from the controller and the black wire that connects to the power switch.

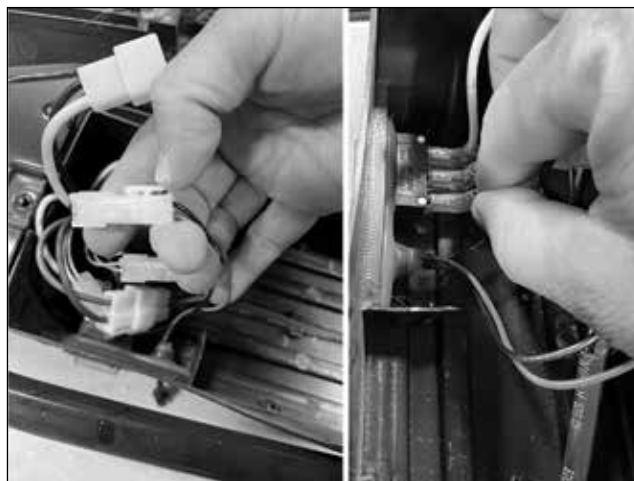

Step 5

Using a flat screwdriver, remove the plastic glue on the back of the charger port. Using long needle pliers, loosen and remove the lock nut that holds the charger port onto the battery tray.

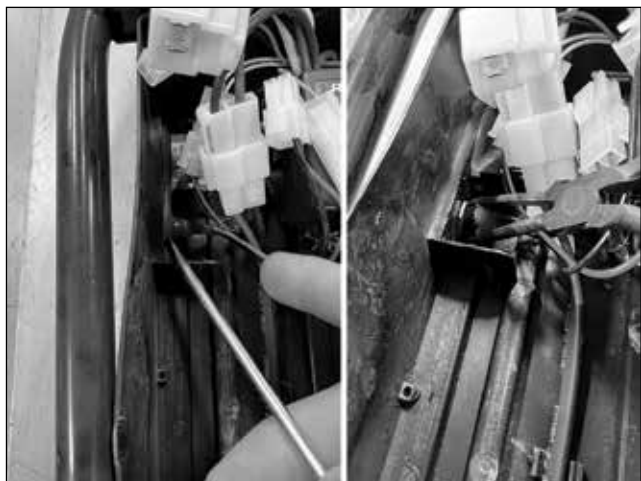

Step 6

Using a small pick, depress the pins from inside the connector and push them out of the connector.

Note: You could also cut the wires since you will be replacing the charger port with a new one.



Step 7

To install a new charger port, reverse steps 1-6.

ATTENTION: Charge battery 12 hours before using.