

**Required Tools: (Not included)**


- 5 mm Allen Wrench
- Flat Screwdriver

**⚠ WARNING**


**⚠ CAUTION:** To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

**Step 1**

Using a 5 mm Allen wrench, remove the hex screw next to the power switch and the two (2) screws under the seat. Remove the seat fairing.

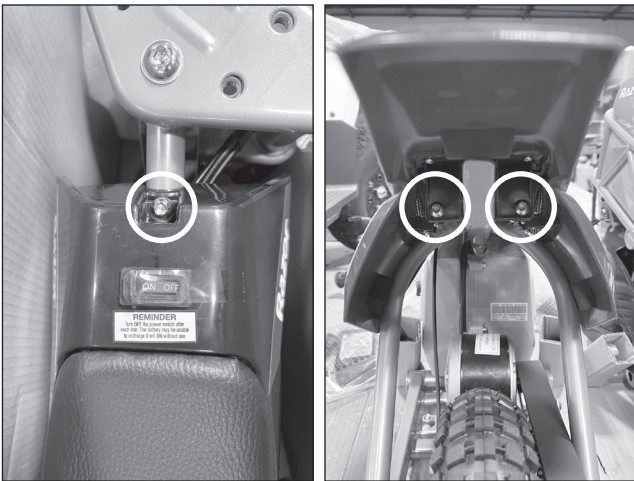
**Step 2**

Carefully disconnect the three (3) wires that connect to the power switch.

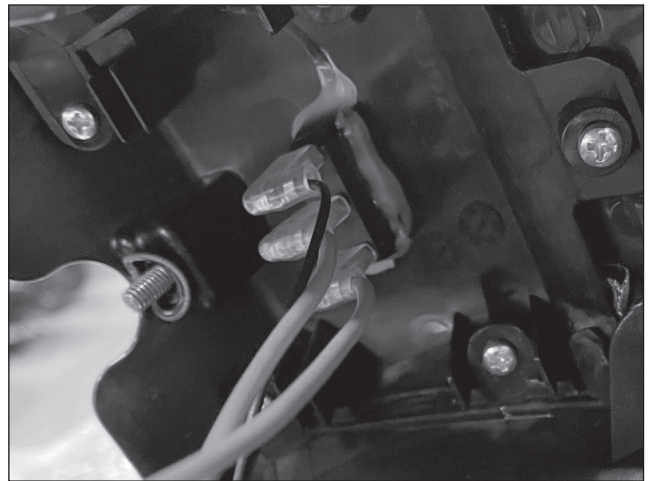

### Step 3

Using a flat screwdriver, remove the silicone from the back of the power switch and push the switch away from the fairing.

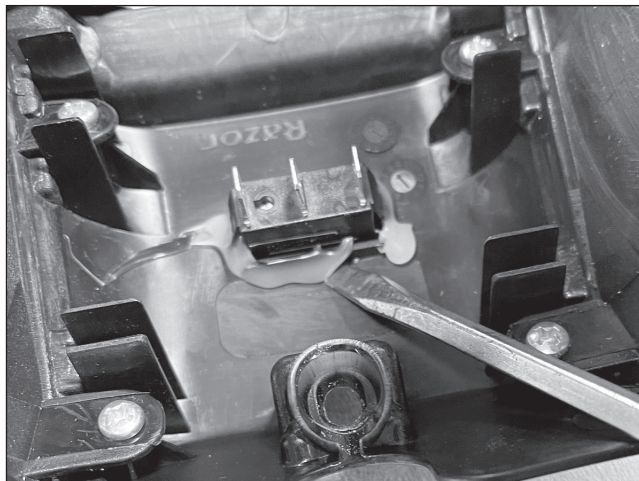

### Step 4

To install a new power switch, reverse steps 1-3.

Note: When reconnecting the power switch, make sure to connect the black wire on the gold colored prong and the two (2) red wires on the silver colored prongs.

**ATTENTION: Charge battery 12 hours before using.**