

Required Tools: (Not included)

- A. Pliers
- B. 5 mm Allen Wrench

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using pliers, remove the end cap from the brake cable.


**Step 2**

Using a 5mm Allen wrench, loosen the bolt that holds the brake cable and remove the cable from the caliper.



Step 3

Using a 5 mm Allen wrench, loosen and remove the two (2) hex bolts that hold the caliper onto the mounting bracket and slide up and out the caliper.

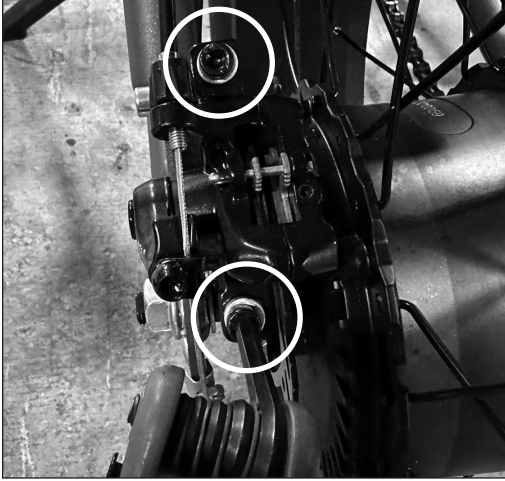

Step 4

Reverse the steps to install the new caliper.

ATTENTION: Charge battery 6 hours before using.