

Required Tool: (Not included)

- Phillips screwdriver

⚠ WARNING


⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a Phillips screwdriver, remove six (6) screws from the deck.

**Step 2**

Using a Phillips screwdriver, remove two (2) screws from the battery bracket.

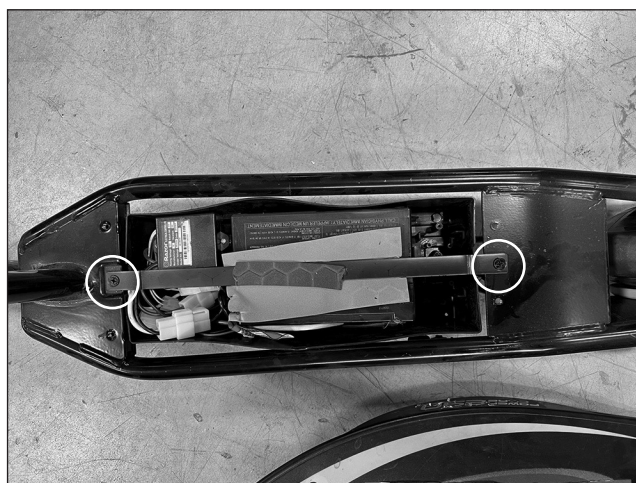

Step 3

Locate and disconnect the battery from the controller.



Step 4

Using one or both hands, remove the battery from the tray.



Step 5

Reverse the procedures to install a new battery

- Place the new battery inside
- Reconnect the battery and control module
- Place the bracket back on the top of the battery
- Reattach the deck with six (6) screws on the deck

Attention: Charge battery 12 hours before using