

Required Tools: (Not included)

- A. Phillips screwdriver
- B. 8 mm open wrench

⚠ WARNING


⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a Phillips screwdriver, remove seven (7) screws from the power switch side of the battery cover.

**Step 2**

Remove four (4) more screws, two (2) at the front and two (2) at the back of the battery cover. Pull the covers out being careful not to damage the wires.

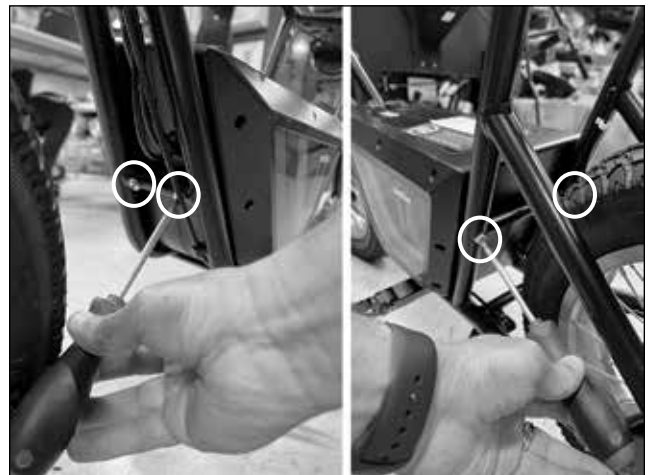

Step 3

Locate and disconnect the taillight from the controller.



Step 4

Using a size 8 mm open wrench, remove the two (2) lock nuts that hold the taillight onto the frame and remove it.



Step 5

To install new taillight, reverse steps 1-4.

Attention: Charge battery 12 hours before using.