

Required Tools: (Not included)

- A. Phillips screwdriver
- B. Flathead screwdriver
- C. Needle nose pliers

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a Phillips screwdriver, remove the seven (7) screws from the power switch side of the battery cover.


**Step 2**

Remove four (4) more screws, two (2) at the front and two (2) at the back of the battery cover, pull the covers out being careful not to damage the wires.



Step 3

Locate and disconnect the battery from the controller.

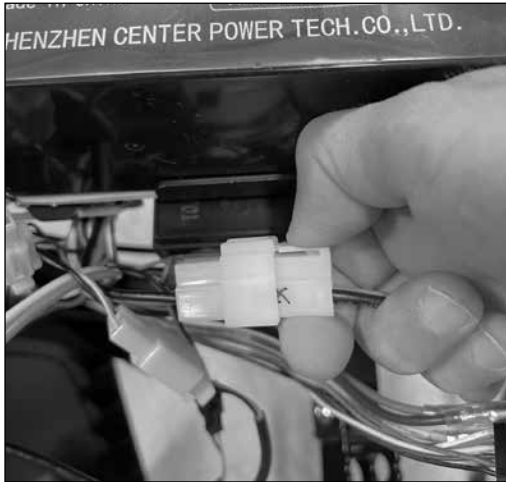

Step 4

Using needle nose pliers, disconnect the three (3) wires that connect to the power switch.



Step 5

Using a flat screwdriver, remove the glue at the back of the power switch and push the switch out from the battery cover.



Step 6

Reverse the steps to install the new power switch.

NOTE:

When reconnecting the controller to the power switch make sure the black wire connects to the gold colored prong, the red wire to the middle silver colored prong and yellow wire to the remaining silver colored prong.

ATTENTION: Charge battery 12 hours before using.