

Required Tool: (Not included)

- Phillips Screwdriver

⚠ WARNING


⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Lift the seat to access the controller.


**Step 2**

Locate and disconnect the battery from the controller. Remove the battery to allow access to the controller.

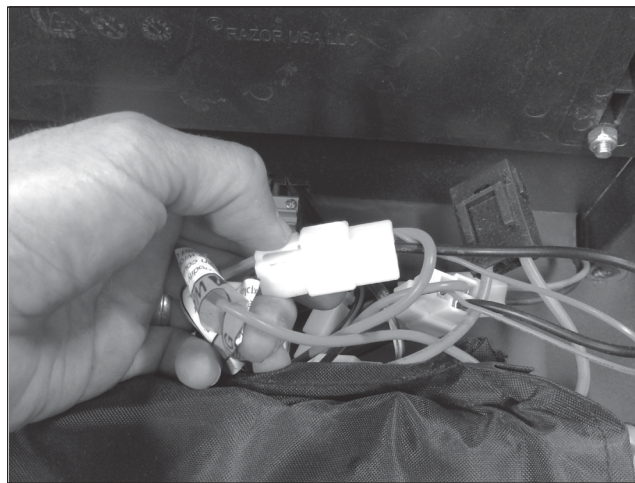


Step 3

Disconnect the rest of the connectors from the controller.

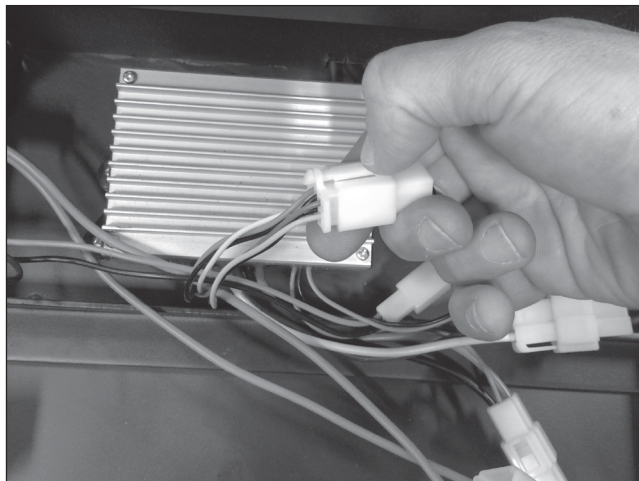

Step 4

Using a Phillips screwdriver, remove the two (2) screws that hold the controller to the bracket.

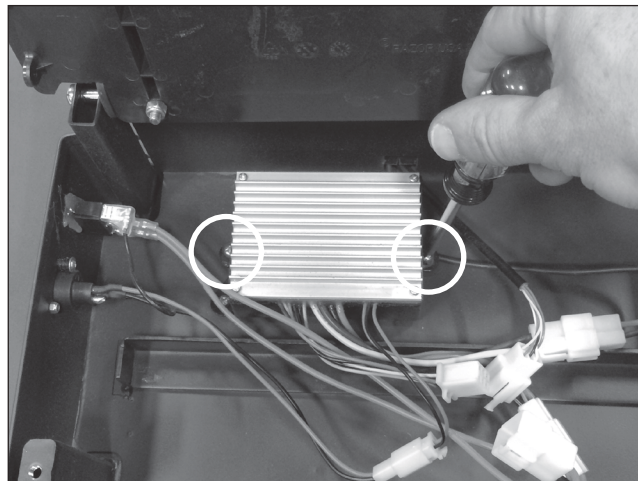

Step 5

To install a new controller, reverse steps 1 through 4.

ATTENTION: Charge battery 12 hours before using.