

Required Tools: (Not included)


- A. Phillips screwdriver
- B. 5 mm Allen wrench
- C. Flat screwdriver
- D. Long needle pliers
- E. 10 mm wrench

⚠ WARNING


⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a Phillips screwdriver, remove seven (7) screws from the side of the battery cover with the power switch.

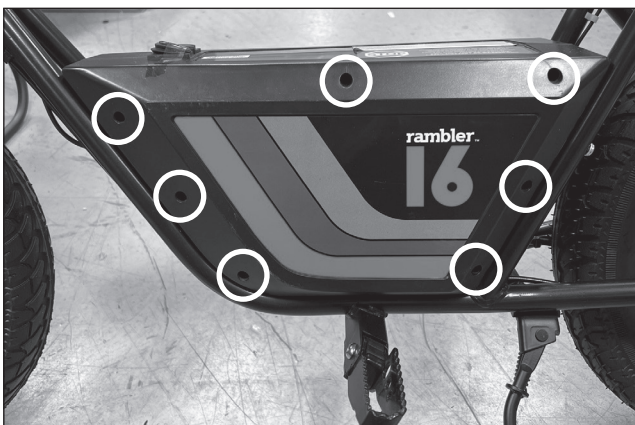**Step 2**

Remove four (4) screws, two (2) at the front and two (2) at the back of the battery cover. Pull the cover out. Be careful not to damage the wires.

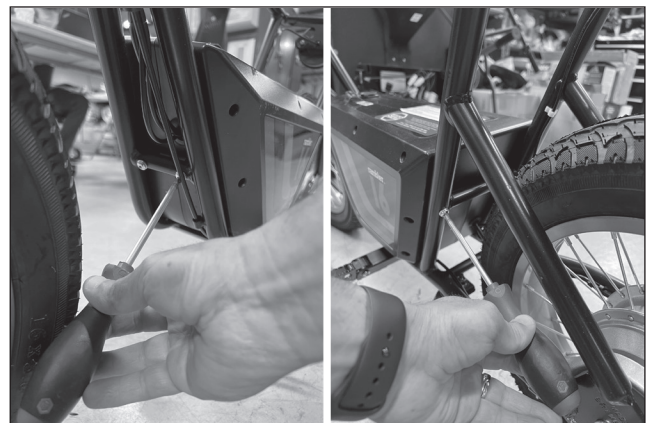

Step 3

Locate and disconnect the brake lever from the controller.



Step 4

Using a 5 mm Allen wrench, loosen the set screw from the brake lever and move the lever away from the grip.




Step 5

Using a flat screwdriver, insert the blade of the screwdriver in between the grip and the handlebar. Add a few drops of lubricant or soapy water and remove the grip and brake lever.



Step 6

Using long needle pliers, remove the end cap from the brake cable. Save for re-installation. Using a 10 mm wrench, loosen the lock nut that holds the brake cable in place. Pull the cable out from the unit.

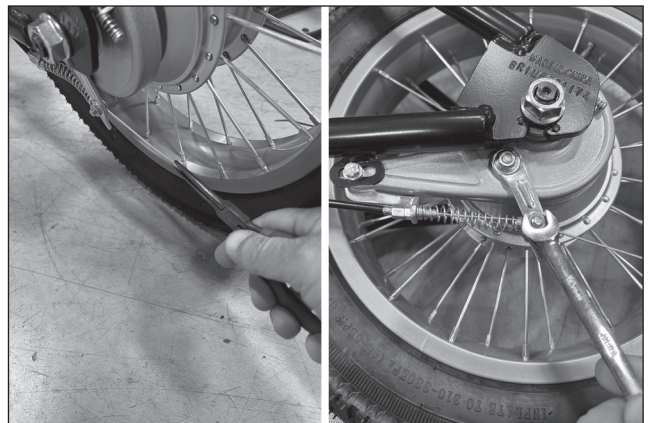

Step 7

Reverse the steps.

ATTENTION: Charge battery 12 hours before using.