

Required Tools: (Not included)

- A. Phillips screwdriver
- B. 4 mm Allen wrench

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a Phillips screwdriver, remove two (2) screws located under the seat at the back of the unit.

**Step 2**

Lift and pull back on the seat to remove.




Step 3

Locate and disconnect the three (3) battery connectors from the controller.



Step 4

Using a 4 mm Allen wrench, loosen and remove four (4) hex bolts that hold the battery onto battery tray. Using both hands lift and remove the battery from the tray.

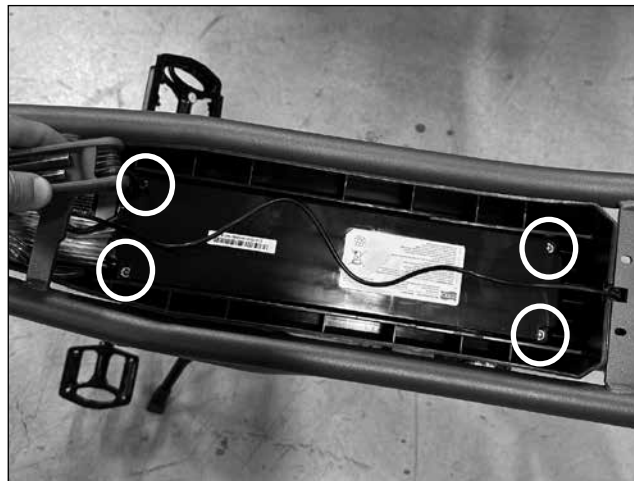

Step 5

To install new battery, reverse steps 1-4.

ATTENTION: Charge battery 6 hours before using.