

Required Tool: (Not included)

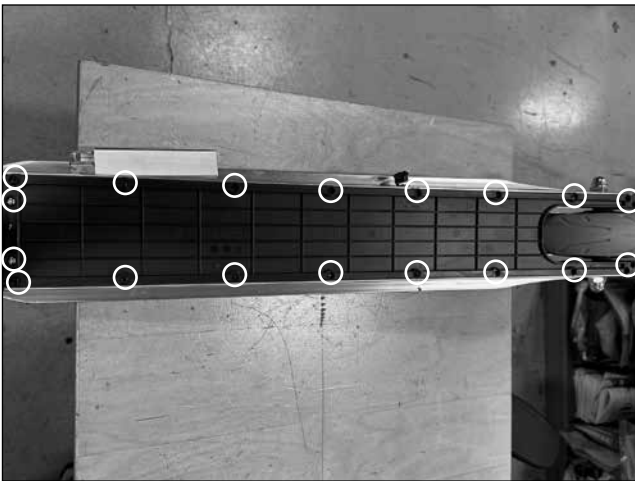
- Phillips Screwdriver

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Flip the unit over. Using a Phillips screwdriver, remove twenty (20) screws from the bottom of the unit.

**Step 2**

Lift and remove the battery cover from the unit.



Step 3

Locate and disconnect the battery from the controller and the charger port.



Step 4

Using a Phillips screwdriver, remove four (4) screws that hold the battery onto the frame.



Step 5

Lift and remove the battery from the unit.



Step 6

To install new battery, reverse steps 1-5.

- Place the new battery inside.
- Re-connect the battery to the controller and charger port.
- Secure the battery to the frame with four (4) screws.
- Re-attach the battery cover with twenty (20) screws.

ATTENTION: Charge battery 8 hours before using.