


Step 1

Using A Phillips screw driver loosen up and remove two screws located on the the charging port/ power switch plastic cover.


**Step 2**

Being very careful lift and rest the unit on the back wheels.

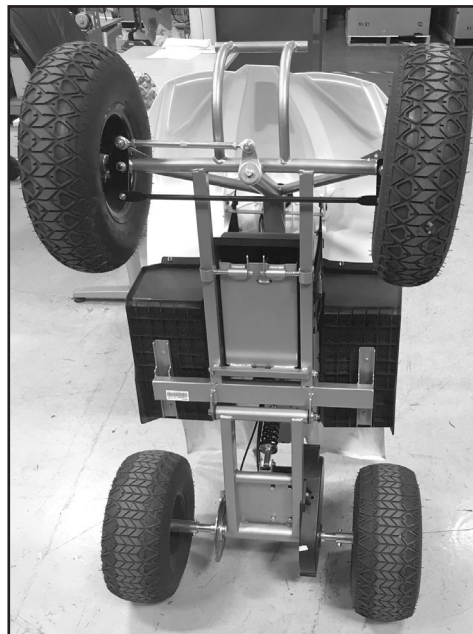

Step 3

Using wire cutters, cut and remove the zip tie that keeps all wires together, locate and disconnect the throttle from the controller.

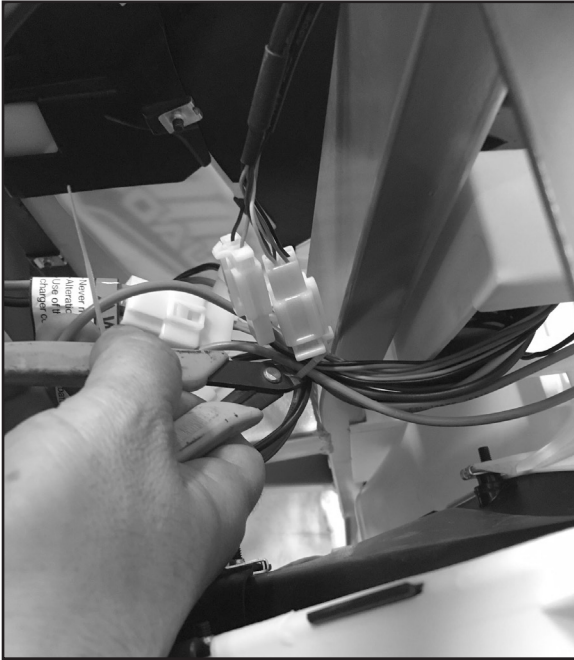**Step 4**

Using a 3mm Allen wrench loosen up the set screw on the throttle and move the throttle away from the hand grip.



Need Help? Visit our website at www.razor.com or call toll-free at **866-467-2967** Monday - Friday 8:00 AM - 5:00 PM PST.

Step 5

Insert a flat screw driver between the handle bar and the grip and apply a few drops of WD40 or soapy water to easily remove the grip from the handle bar.

**Step 6**

Untangle the plastic wrap from the throttle cable and remove.

**Step 7**

Reverse the procedures

Attention: Charge battery 12 hours before using