HOVERTRAX PRIZMA / HOVERTRAX LUX / HOVERTRAX BLACK LABEL / HOVERTRAX 1.5 BATTERY REPLACEMENT INSTRUCTIONS PART# W15156208003

Required Tools: (Not included)

A. Phillips screwdriver


B. 4 mm Allen wrench

⚠WARNING

⚠CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before performing any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.


Step 1

Flip the unit over and using a Phillips screwdriver, remove the six screws from the cover without the charger port/switch.

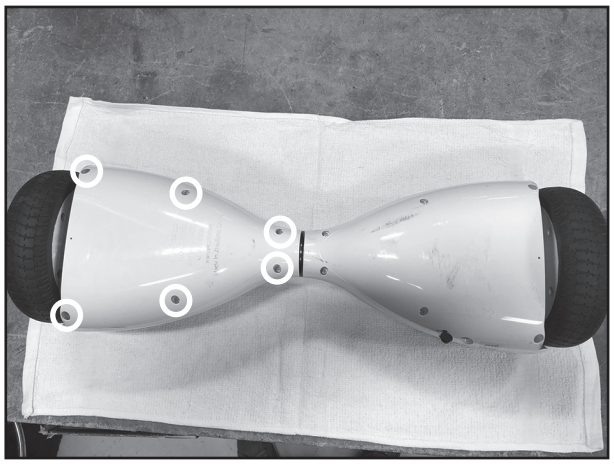


Step 2

Lift up the cover being careful not to pull the wires and set cover aside.

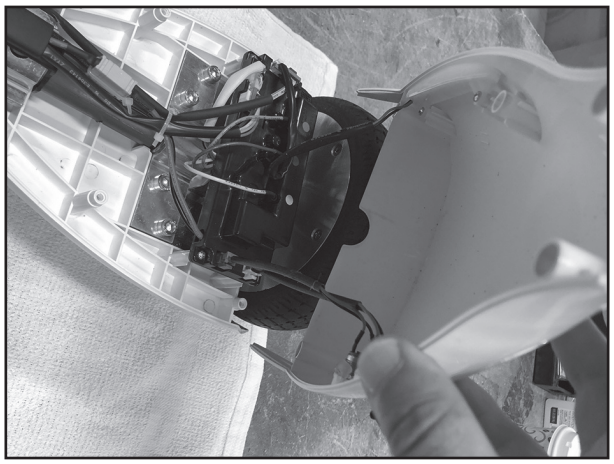


Step 3

Disconnect the yellow connector from the battery.

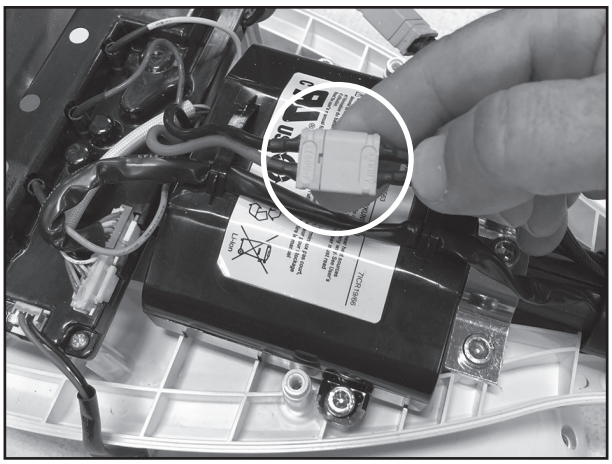

Step 4

Using a 4 mm Allen wrench, remove the two (2) Allen bolts that hold the battery onto the unit.

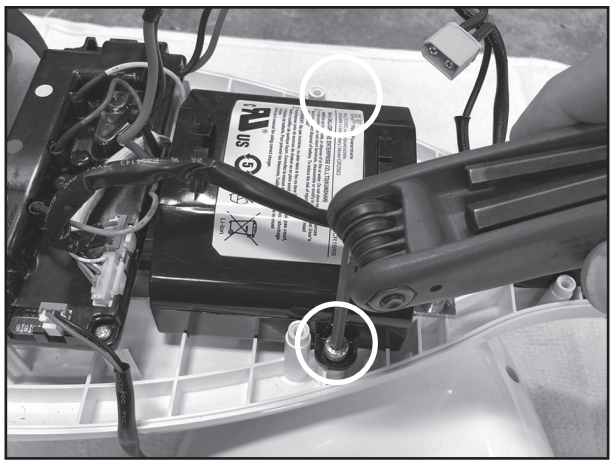

Step 5

Reverse the procedures

- Insert new battery in place and secure it with the two (2) Allen bolts.
- Reconnect the yellow connector to the battery.
- Put down the cover and reattach the six (6) screws.

Attention: Charge battery 6 hours before using.