


Step 1

Using A Phillips screw driver loosen up and remove two screws located on the the charging port/ power switch plastic cover.


**Step 2**

Being very careful lift and rest the unit on the back wheels.

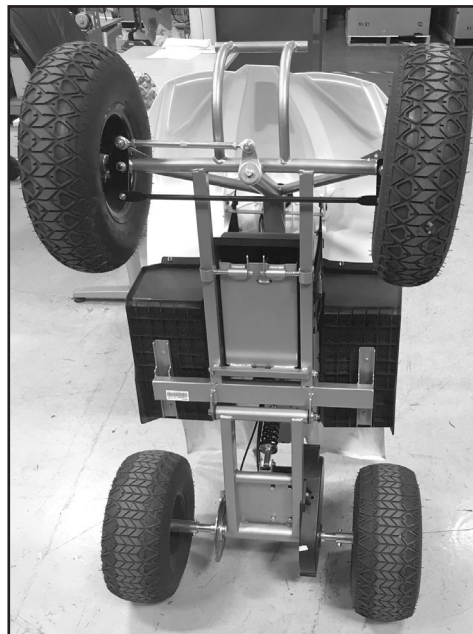

Step 3

Using wire cutters, cut and remove the zip tie that keeps all wires together, locate and disconnect all the connectors from the controller.

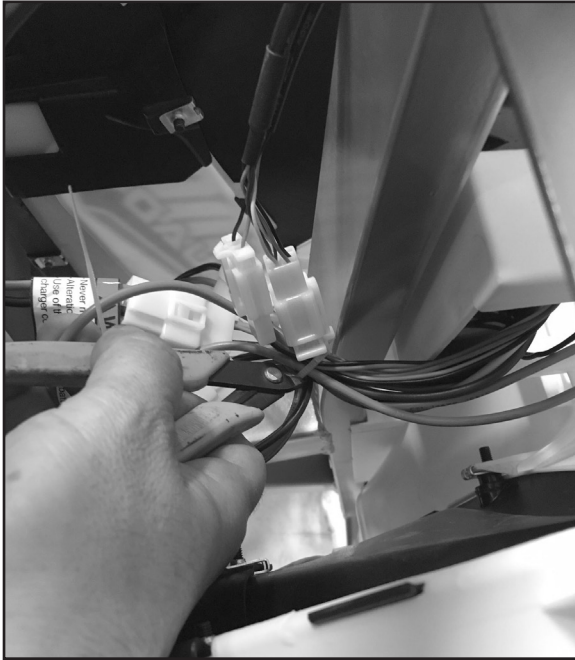**Step 4**

Lift and remove the controller from the unit.

**Step 5**

Reverse the procedures

Attention: Charge battery 12 hours before using