

Required Tools: (Not included)

- Phillips screwdriver
- Pliers

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Lift the seat to access the charger port.


**Step 2**

Locate and disconnect the battery from the controller. Remove the battery to have better access to the charger port.



Step 3


Locate and disconnect the charger port from the controller.

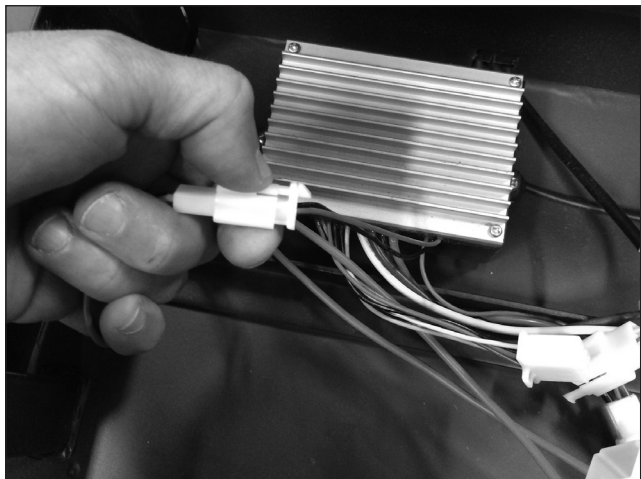

Step 4

Using a Phillips screwdriver and pliers, remove the two (2) screws that hold the charger port to the frame.

NOTE: The screws are held by lock nuts from the inside of the battery compartment.

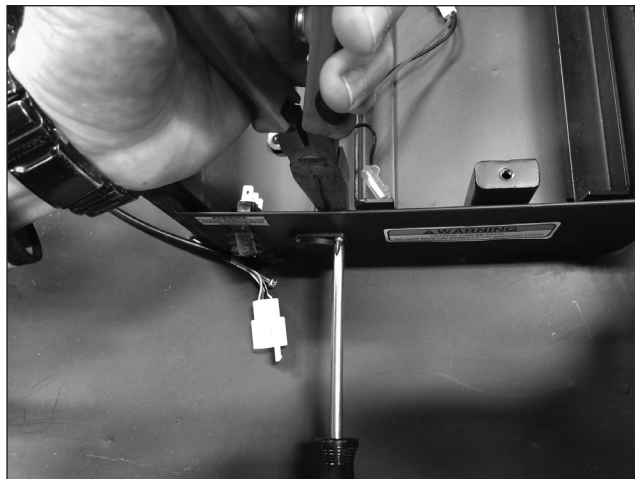

Step 5

To complete the assembly, please reverse steps 1 through 4.

ATTENTION: Charge battery 12 hours before using.