

Required Tools: (Not included)

- 3 mm Allen wrench
- Phillips screwdriver
- Flathead screwdriver

⚠ WARNING


⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a Phillips screwdriver, remove the ten (10) screws from the bottom of the deck.


**Step 2**

Using a Phillips screwdriver, remove the two (2) screws from the front cover. Remove the cover and set aside.

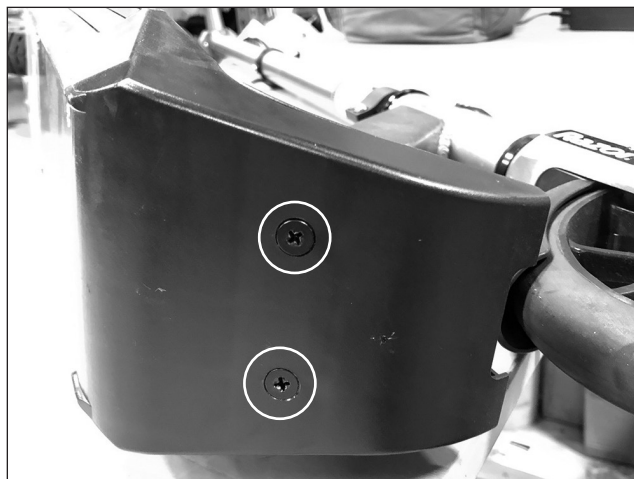


Step 3

Remove the plastic cover from the unit. Locate and disconnect the throttle and power switch wires from the controller.

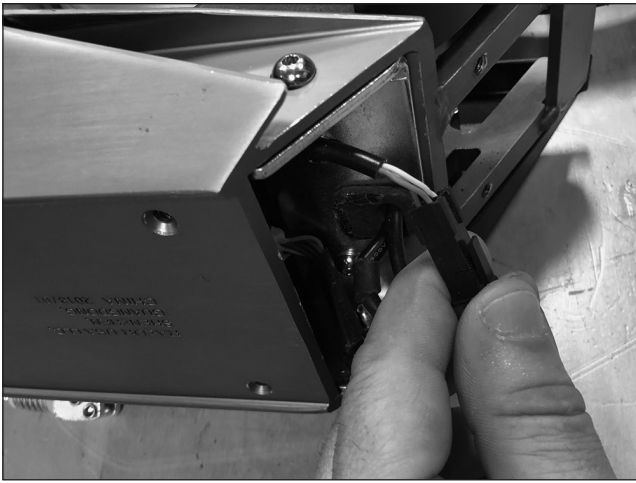


Step 4

Remove the grommet from the metal bracket. If needed, use a flathead screwdriver to help push the grommet. Push the throttle and power switch wires inside the opening.

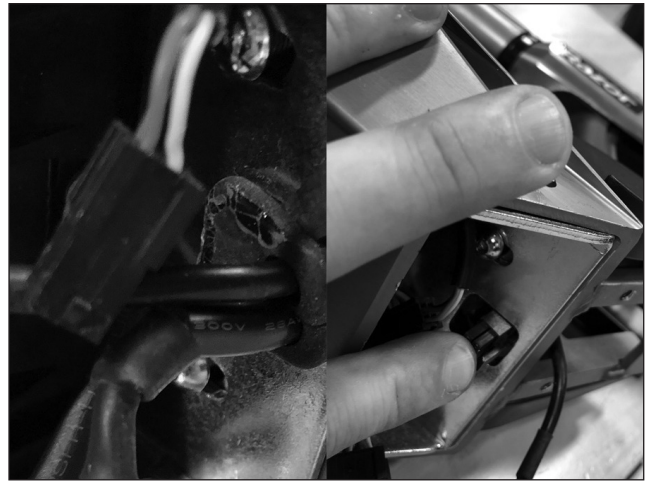


Step 5

Using a 3 mm Allen wrench, remove the four (4) hex screws and pull the bracket out of the frame.

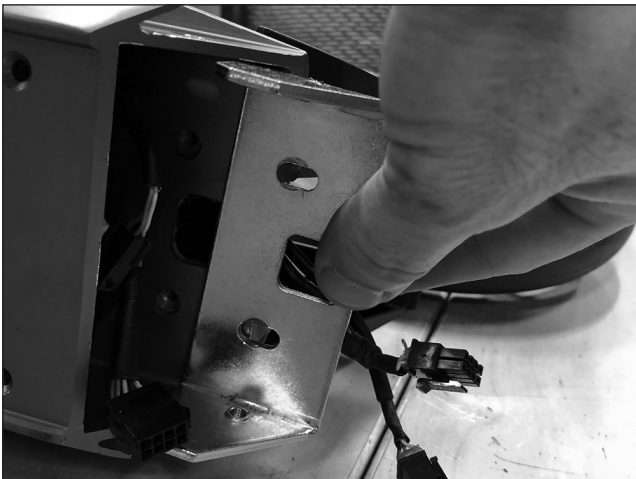

Step 6

Remove the controller cover to access the wires.

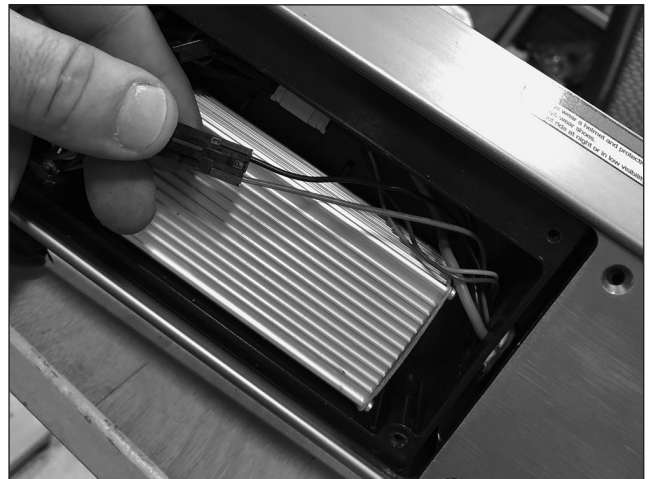

Step 7

Disconnect the three (3) wires that come from the front of the unit.



Step 8

Slide the battery out. Reverse the steps to install a new battery.

ATTENTION: Charge battery 5 hours before using.

