

**Tools Required:** (Not included)

- A. Flat head screwdriver
- B. 10mm open wrench

**Step 1**

Flip your Drifter unit on the side to have access to the chain tensioner

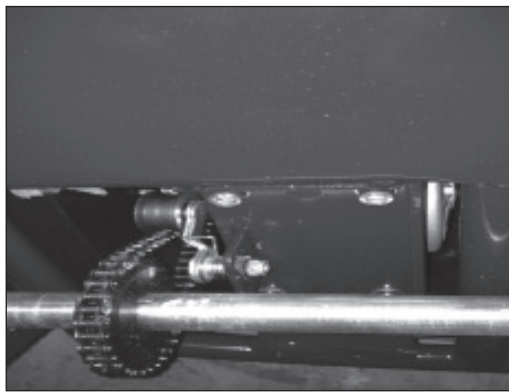


Figure 1

**Step 2**

With a flat screw driver remove the spring from the tensioner arm.



Figure 2

**Step 3**

Using two 10mm open wrenches loosen up the nut and bolt that holds the tensioner onto the frame and remove it.

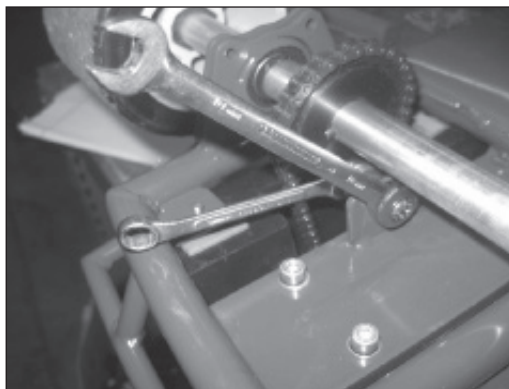


Figure 3

**Step 4**

Replace the chain tensioner with the new one.



Figure 4

## Step 5

The tensioner needs to be positioned so that it is resting on the out side of the chain.

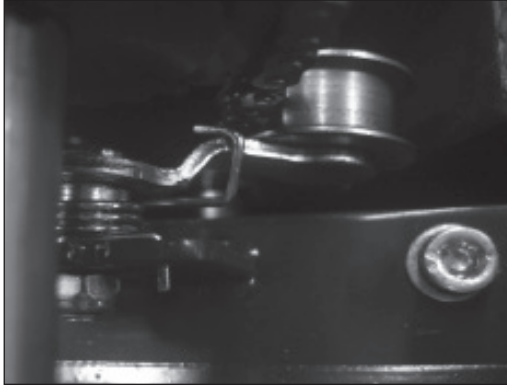


Figure 5

## Step 6

This a self adjusting chain tensioner and there is no need for adjustment.

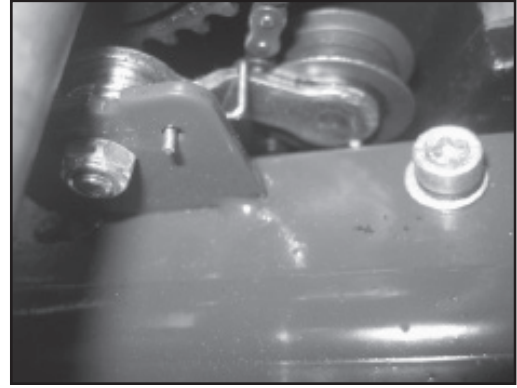


Figure 6

## Step 7

Reverse the procedures