

Required Tools: (Not included)

- A. Phillips screwdriver
- B. Needle nose pliers
- C. Flat head screwdriver

⚠ WARNING


⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a Phillips screwdriver, remove four (4) screws from the battery cover on the side of the product with the power switch.

**Step 2**

Using a Phillips screwdriver, remove six (6) screws from the battery cover on the side of the product with the charger port. Remove the battery covers being careful not to damage the wires. Set battery covers aside.

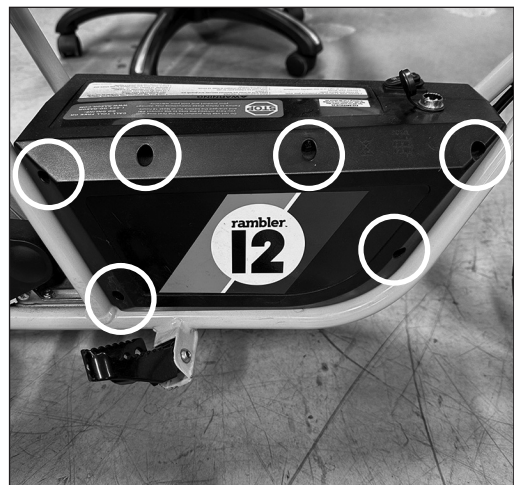

Step 3

Locate and disconnect the two (2) red wires from the controller and one (1) black wire from the charger port.



Step 4

Using a flat screwdriver, remove the glue at the back of the power switch and push the switch out from the battery cover.



Step 5

When reconnecting the power switch, always make sure to connect the red wires from the controller only to the silver prongs of the power switch. The gold colored prong is only for the black wire from the charger port.



Step 6

Reverse the steps to finish the installation.

ATTENTION: Charge battery 12 hours before using.