

Required Tools: (Not included)

- A. Phillips screwdriver
- B. Flat screwdriver
- C. Long needle pliers

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a Phillips screwdriver, remove five (5) screws from the battery cover on the side with the charger port.


**Step 2**

Remove two (2) more screws from the other side of the battery cover. Remove battery cover and set aside.



Step 3

Cut the zip-ties that keep the cables together. Be careful. Only cut the zip-ties and not the cables.

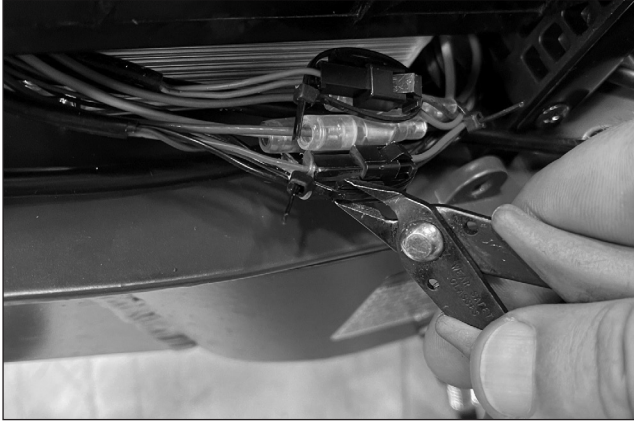

Step 4

Locate and disconnect the battery from the charger port.




Step 5

Using a flat screwdriver, remove the glue at the back of the charger port.



Step 6

Using long needle pliers, remove the lock nut at the back of the charger port. Remove it from the battery cover.

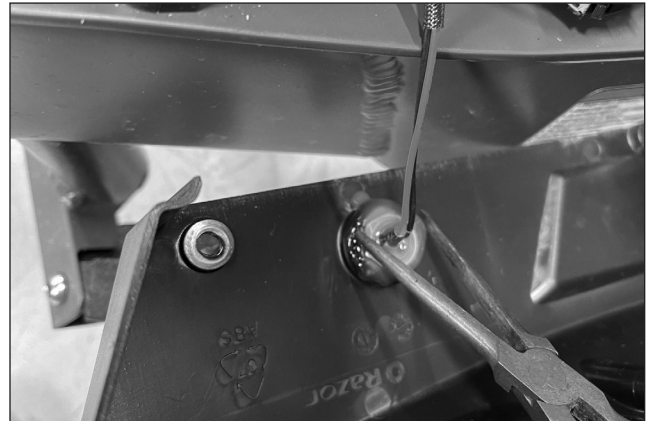

Step 7

Reverse the steps for installation.

ATTENTION: Charge battery 12 hours before using.