

Required Tools: (Not included)

- A. Phillips screwdriver
- B. 4 mm Allen wrench

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a Phillips screwdriver, remove two (2) screws from underneath the seat towards the back of the unit.


**Step 2**

Lift and pull back on the seat to remove.




Step 3

Locate and disconnect all the connectors from the controller.

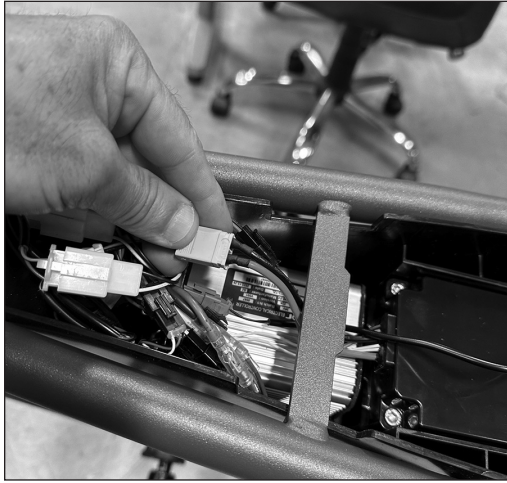

Step 4

Using a 4 mm Allen wrench, loosen and remove four (4) hex bolts that hold the battery onto the battery tray. Using both hands, lift and remove the battery from the tray.

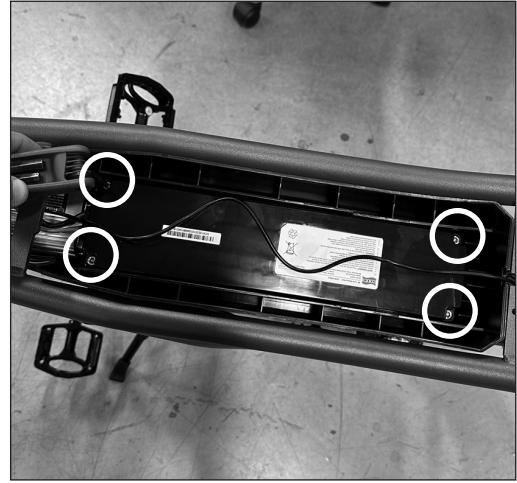

Step 5

Using a Phillips screwdriver, loosen and remove the two (2) screws that hold the controller to the tray.



Step 6

Reverse the steps to install the new battery.

ATTENTION: Charge battery 6 hours before using.