

Required Tools: (Not included)


- 4mm Allen Wrench
- 10mm Open Wrench

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a 4mm Allen wrench remove two (2) screws located under the seat at the back of the unit.

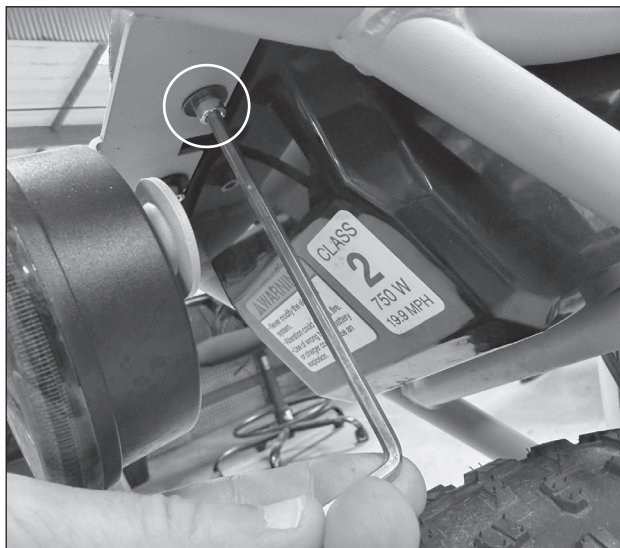
**Step 2**

Lift and pull back on the seat to remove it.




Step 3

Locate and disconnect the taillight connector from the controller.

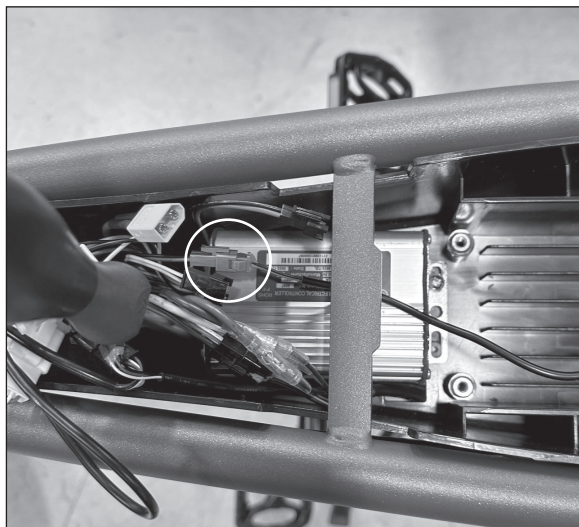

Step 4

Using a 10mm open wrench, loosen and remove the two (2) lock nuts that hold the taillight onto the frame.

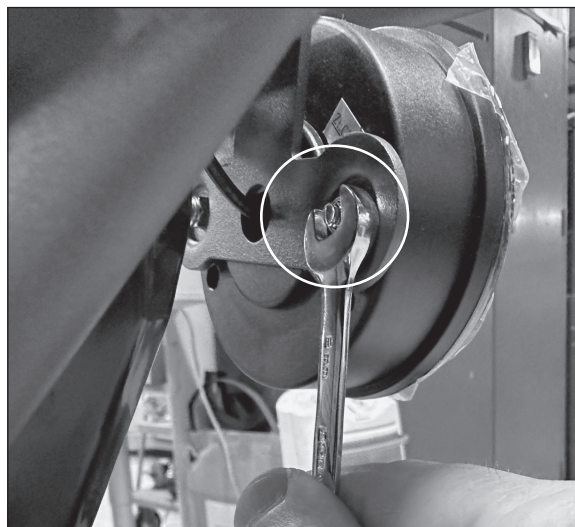

Step 5

Insert a new taillight, then reverse steps 1 through 4.

ATTENTION: Charge battery 12 hours before using.