

Required Tools: (Not included)


- A. Phillips Screwdriver
- B. 10 mm Open Wrench

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a Phillips screwdriver, remove the two (2) screws located under the seat at the back of the unit.

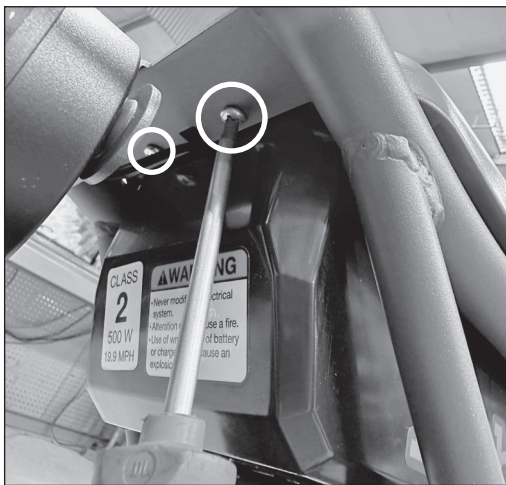
**Step 2**

Lift and pull back on the seat to remove the seat. Set the seat aside.




Step 3

Locate and disconnect the taillight connector from the controller.

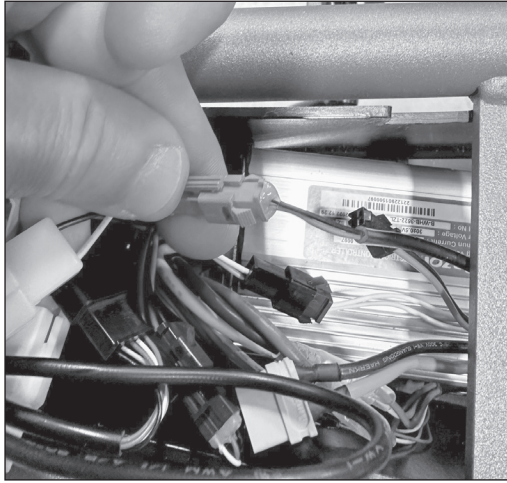

Step 4

Using a 10 mm open wrench, loosen and remove the two (2) lock nuts that hold the taillight onto the frame.

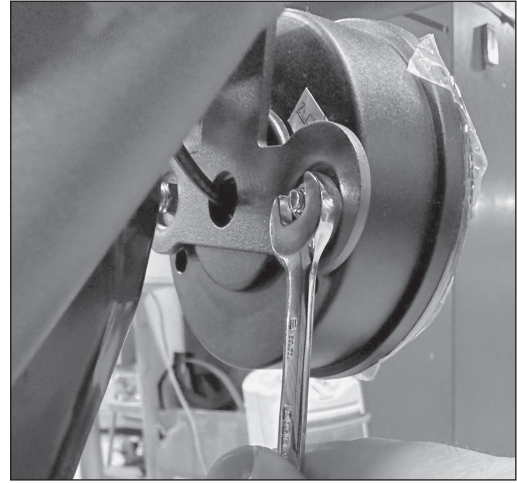

Step 5

Reverse the procedures to install the new taillight.

ATTENTION: Charge battery 6 hours before using.