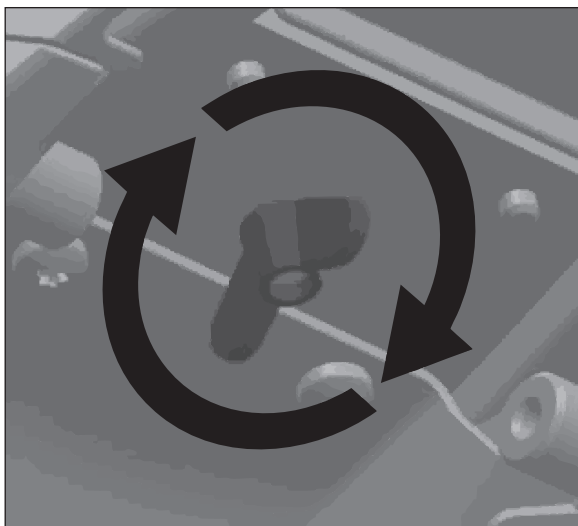


⚠ WARNING


⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Remove the wingnut located under the seat towards the rear.


**Step 2**

Lift and remove the seat.

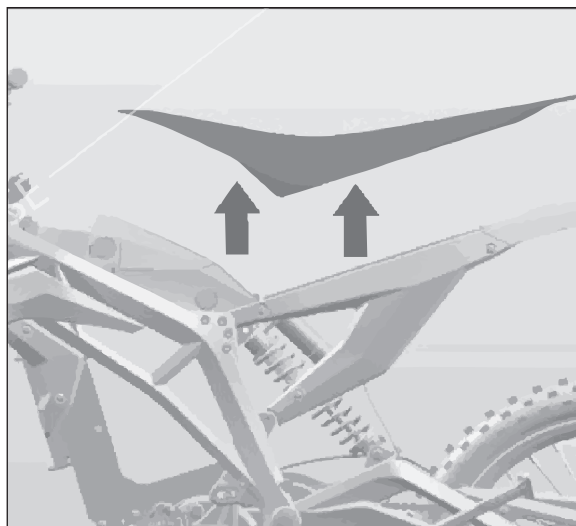


Step 3

Insert the key into the battery cover lock, then push in and turn it clockwise to unlock.

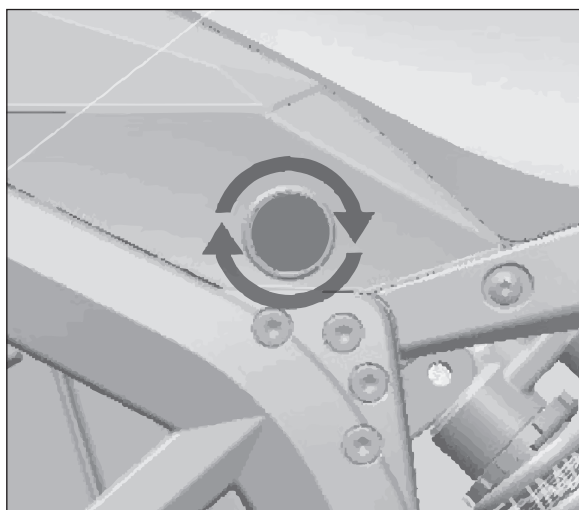


Step 4

Remove the battery cover.

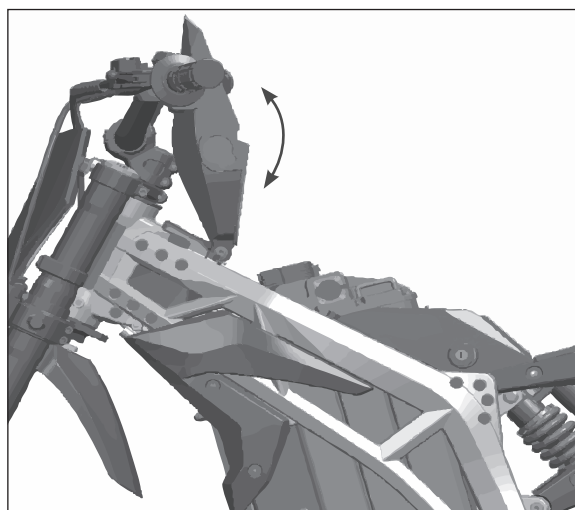


Step 5

Set the fuse switch to the OFF position.

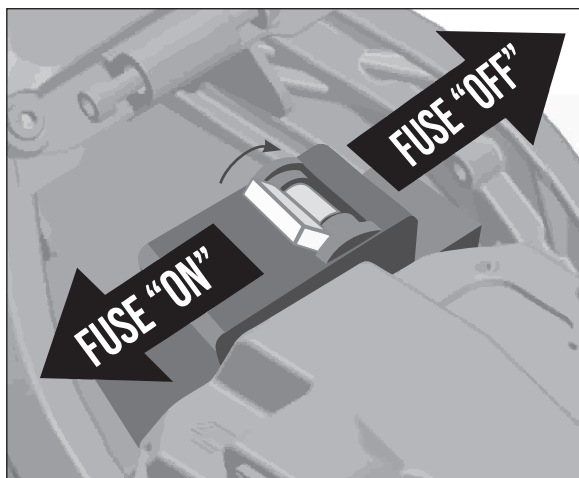


Step 6

Remove the power connector. Slide the tab down and push it in to release.

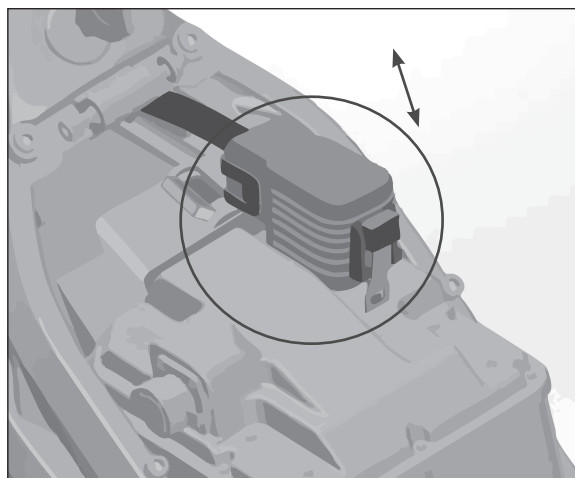

Step 7

Carefully lift up the battery to remove it.

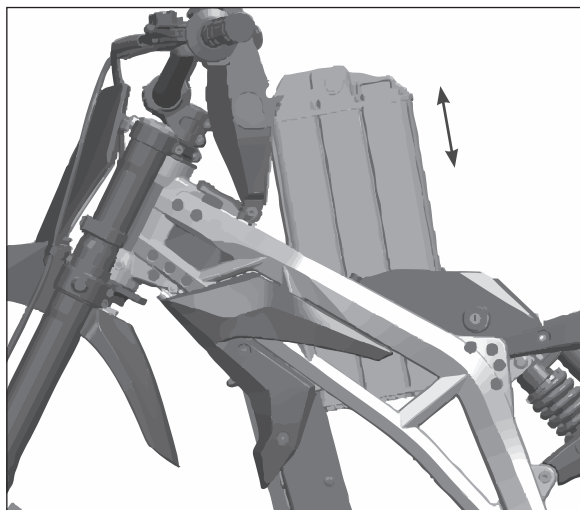

Step 8

Insert a new battery, then reverse steps 1 through 7.

ATTENTION: Charge battery 12 hours before using.