

⚠ WARNING


⚠ CAUTION: To avoid potential shock or other injury, turn power switch **OFF** and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Required Tool: (Not included)


- Phillips screwdriver

Step 1

Using a Phillips screwdriver, remove the five (5) screws from the rear battery cover. Set cover aside.

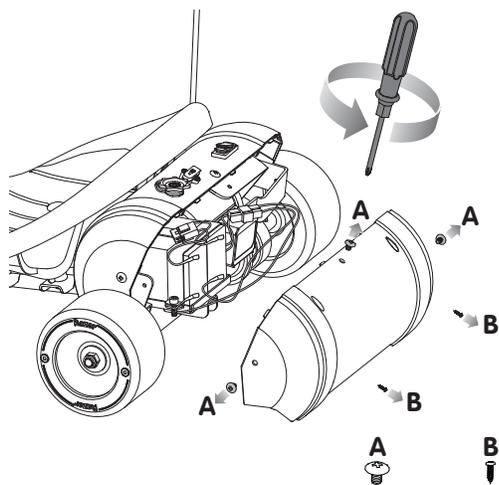
**Step 2**

Using a Phillips screwdriver, remove the two (2) screws from the controller.

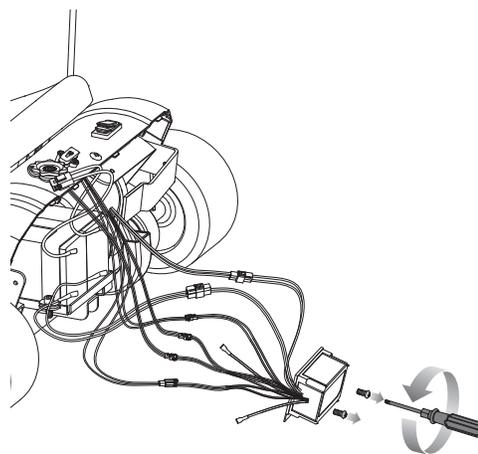

Step 3

Unplug all of the connectors and remove the controller.

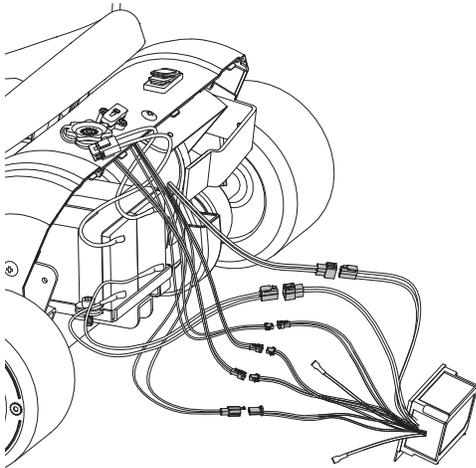

Step 4

Install the new controller, then reverse steps 1 through 3.

Note: Make sure the two red wires that connect to the power switch connect to the two silver prongs. The gold-colored prong is only for the black wire from the charger port.

ATTENTION: Charge battery 12 hours before using.