

**Required Tools: (Not included)**


- Phillips screwdriver
- 5 mm Allen wrench

**⚠ WARNING**


**⚠ CAUTION:** To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

**Step 1**

Using a Phillips screwdriver, loosen and remove four (4) screws on the chain guard. Remove the chain guard.

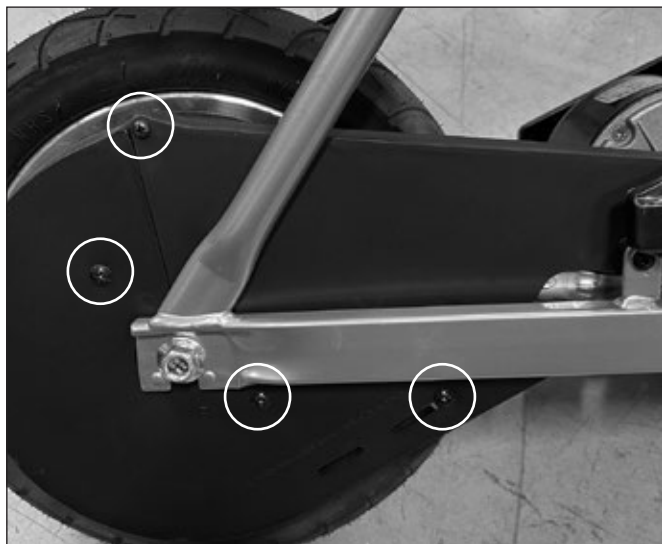
**Step 2**

Using a 5 mm Allen wrench, loosen and remove the two (2) hex bolts that keep the chain tensioner onto the frame.

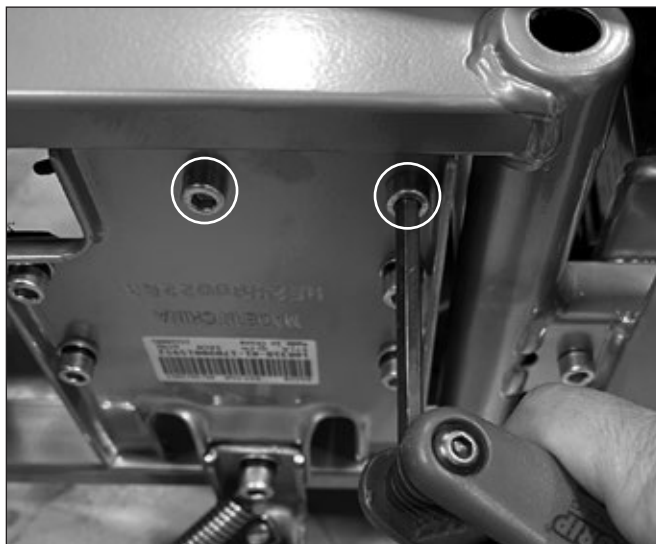

## Note

Make sure the chain tensioner roller is pushing upwards onto the bottom of the chain.

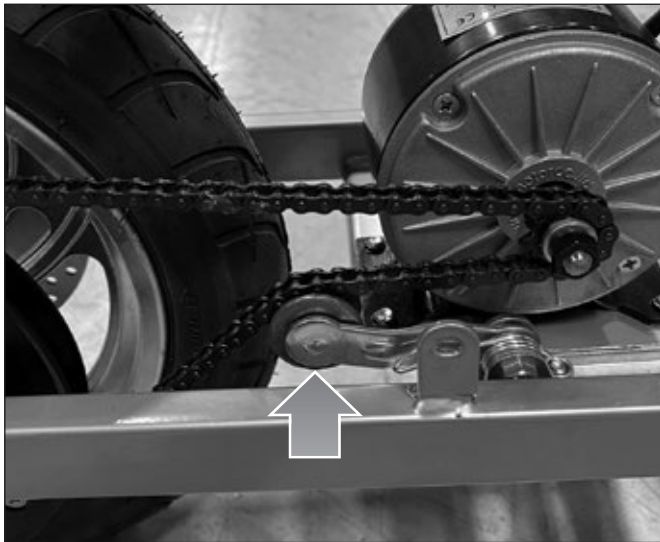

## Step 3

Install the new chain tensioner, then reverse steps 1 through 2.

**ATTENTION: Charge battery 12 hours before using.**