

Required Tools: (Not included)


- Phillips screwdriver
- 10 mm wrench
- Wire cutters
- 3 mm Allen wrench
- 4 mm Allen wrench
- Small flat screwdriver

⚠ WARNING


⚠ CAUTION: To avoid potential shock or other injury, turn power switch **OFF** and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a Phillips screwdriver, loosen and remove seven (7) screws from the battery cover on the side with the charger port.

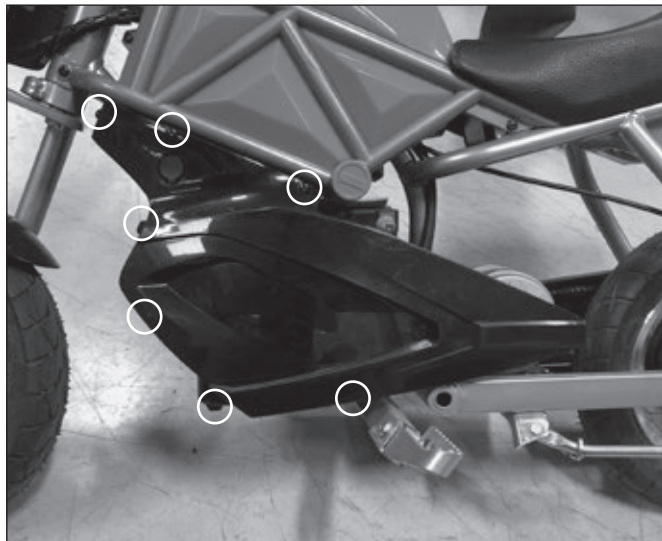**Step 2**

Using a 10 mm wrench, loosen and remove the two (2) lock nuts under the seat. Lift and remove the seat from the frame and set aside.

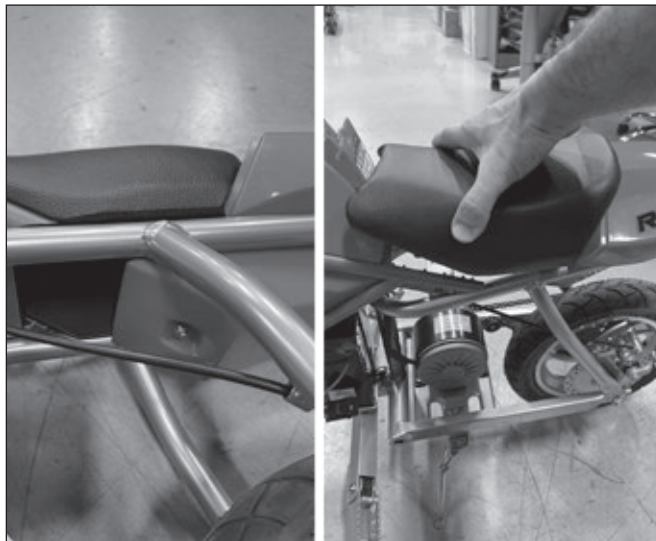

Step 3

Using a Phillips screwdriver, remove the two (2) screws below the warning label. Pull up on the plastic piece. Remove it and set aside.




Step 4

Lift the cover from the storage compartment and remove two (2) self-tapping screws.



Step 5

Using a Phillips screwdriver, remove three (3) self-tapping screws on the front of the "gas" tank and two (2) regular screws from the steering tube.

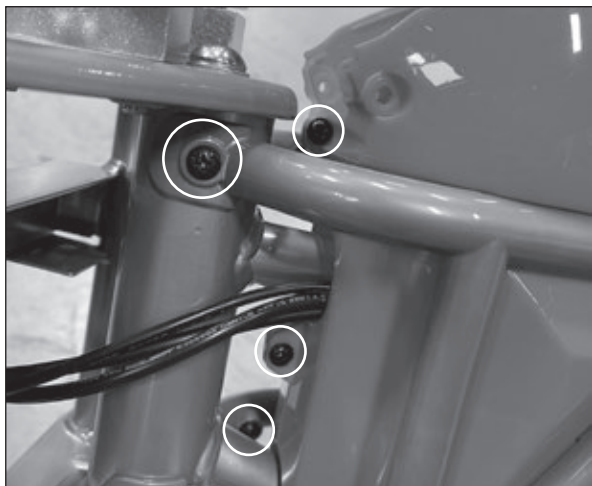


Step 6

Remove two (2) self-tapping screws from the bottom of the "gas" tank and one (1) regular screw from the main frame.




Step 7

Using a 4 mm Allen wrench, remove the two (2) hex bolts that hold the controller onto the frame.

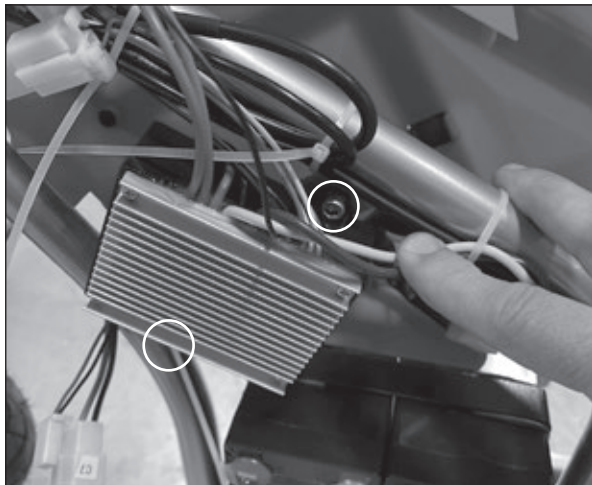


Step 8

Locate and disconnect the throttle from the controller. Using wire cutters, cut the zip ties that hold the cables in place.

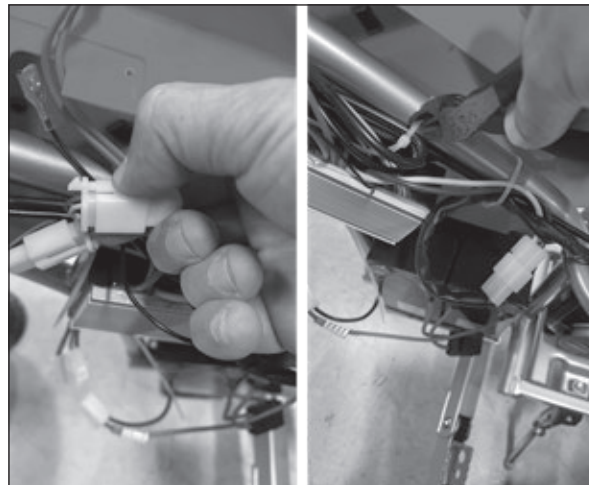

Step 9

Using a 3 mm Allen wrench, loosen the set screw from the throttle. Move the throttle away from the grip.

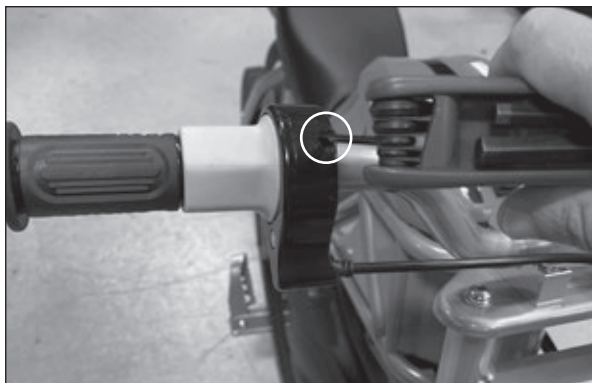

Step 10

Insert the blade of a small flat screwdriver in between the grip and the handlebar. Using soapy water or lubricant, apply some drops in between the handle and the grip and remove the grip and the throttle.



Step 11

Install the new E-Kit, then reverse steps 1 through 10.

Note: When reconnecting the wires to the power switch, remember to always connect the black wire to the gold-colored prong. The other two wires from the controller connect to the silver-colored prongs and can be installed in any sequence.

ATTENTION: Charge battery 12 hours before using.