



**PRO SPEC**  
**THROTTLE REPLACEMENT**  
PART NUMBER: W15128501043

**Required Tools: (Not included)**


- Phillips screwdriver
- 3 mm Allen wrench
- Wire cutters

**⚠ WARNING**

**⚠ CAUTION:** To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

**Step 1**

Using a Phillips screwdriver, remove the ten (10) screws from the left side battery cover.

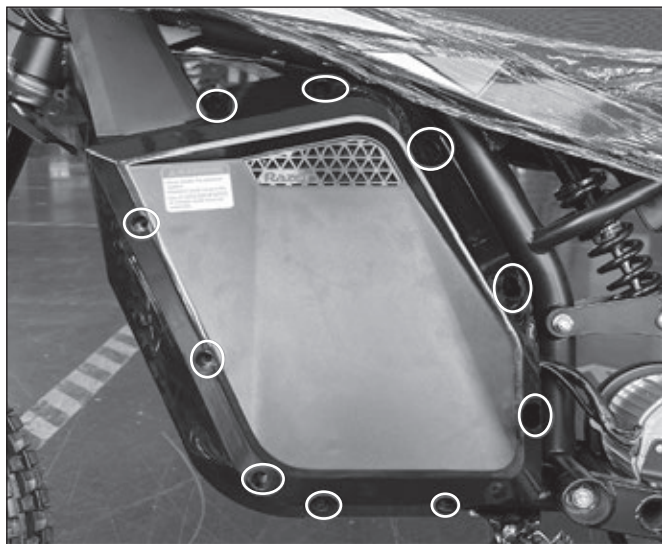


**Step 2**

Using a Phillips screwdriver, remove the screw from the battery front cover.




### Step 3

Remove the left side battery cover.

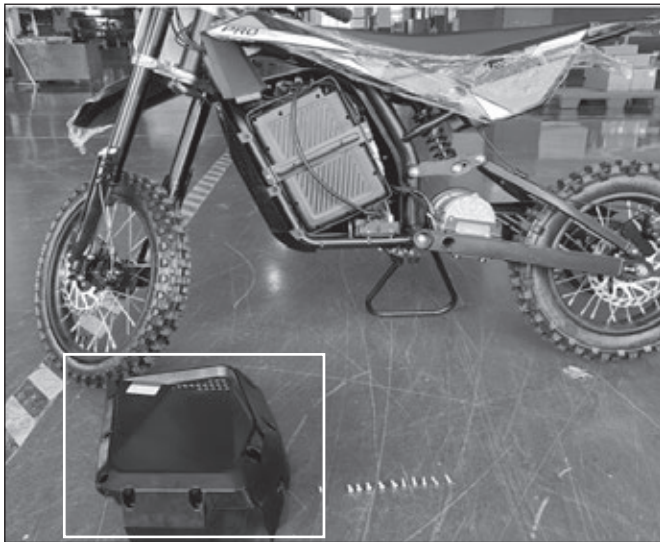


### Step 4

Disconnect the battery connector.

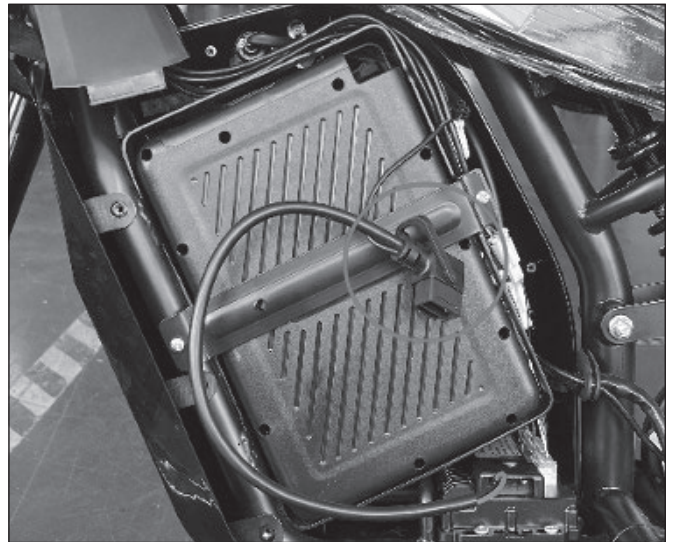

### Step 5

Using wire cutters, cut the zip ties, then disconnect the throttle connector.

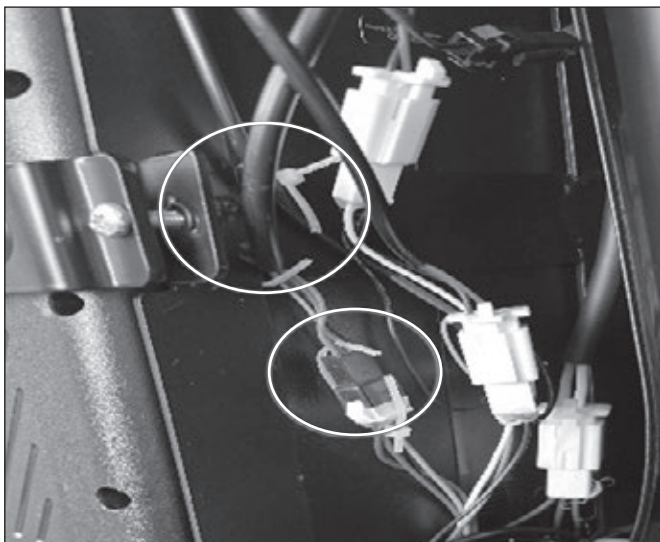


### Step 6

Remove the throttle wire from the brake.




### Step 7

Using a 3 mm Allen wrench, remove the screw on the throttle.

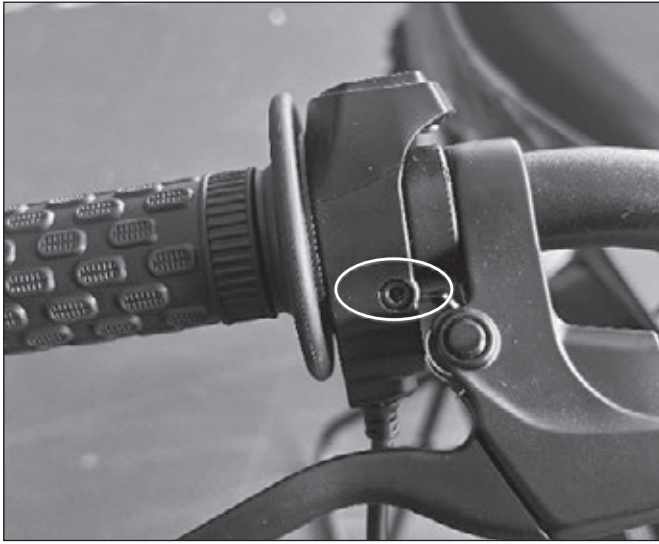

### Step 8

Remove the throttle.

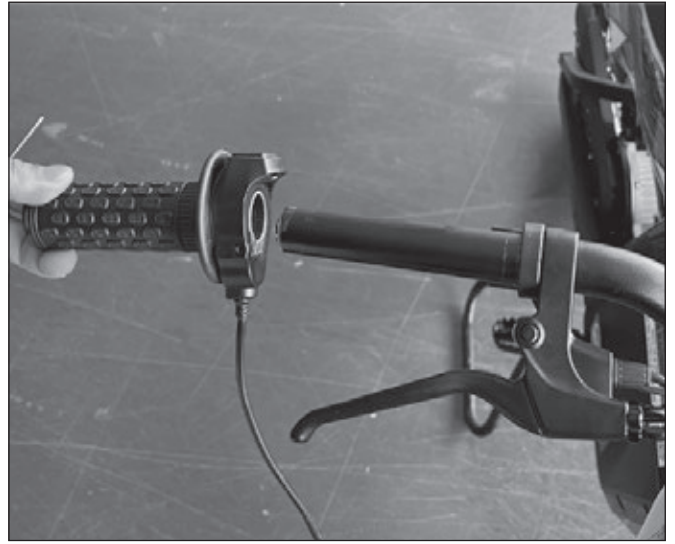

### Step 9

Install the new throttle, then reverse steps 1 through 8.

**ATTENTION: Charge battery 8 hours before using.**