

Required Tools: (Not included)


- Phillips screwdriver
- 19 mm wrench
- Flathead screwdriver
- Small pointy object

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Using a Phillips screwdriver, loosen and remove seven (7) screws from the battery cover on the side with the charger port.

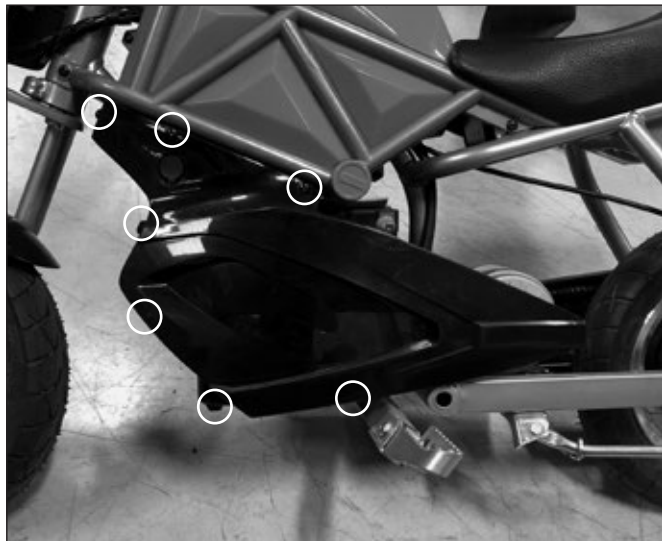**Step 2**

Pull the battery cover off and set aside.



Step 3

Locate and disconnect the charger port from the controller.




Step 4

Using a small pointy object, depress the locking pins on the prongs and push them out of the connector.



Step 5

Using a flat screwdriver, remove the glue from the back of the charger port.

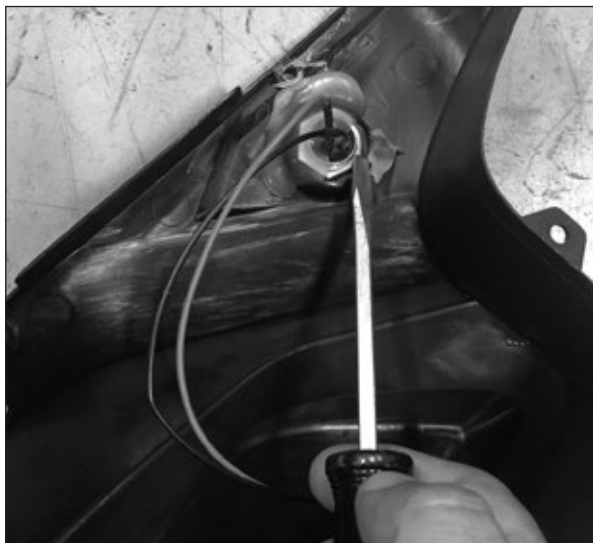

Step 6

Using a 19 mm wrench, loosen and remove the lock nut on the back of the charger port.



Step 7

Install the new charger port, then reverse steps 1 through 6.

ATTENTION: Charge battery 12 hours before using.