

Required Tools: (Not included)

- Phillips screwdriver
- Long needle pliers
- Flat screwdriver

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

Step 1

Lift the storage compartment cover.

**Step 2**

Using a Phillips screwdriver, remove the two (2) screws from the power switch housing.



Step 3

Remove two (2) screws (one on each side) next to the power switch.




Step 4

Using long needle pliers, disconnect the three (3) wires from the power switch.



Step 5

Using a flat screwdriver, remove the glue from around the power switch. Push the switch out from the housing.

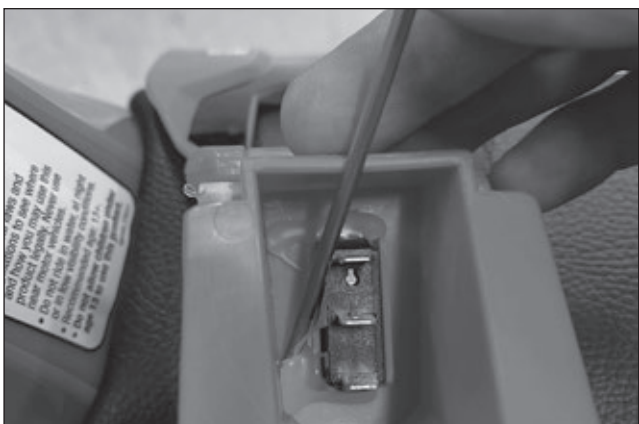

Step 6

Reverse the steps for installation.

NOTE: When reconnecting the wires to the power switch, remember to always connect the black wire to the gold-colored prong. The other two wires from the controller connect to the silver-colored prongs and can be installed in any sequence.

ATTENTION: Charge battery 12 hours before using.

250422_R