



Required Tools: (Not included)

- T25 driver
- Phillips screwdriver

⚠ WARNING

⚠ **CAUTION:** To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.


Step 1

Using a T25 driver, remove the six (6) screws from the deck and pull the deck away from the unit.




Step 2

Locate and disconnect the charger port from the battery and battery connector from the controller.

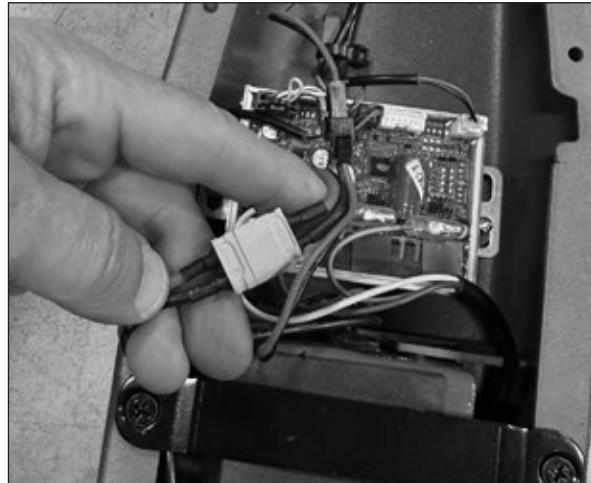

Step 3

Using a Phillips screwdriver, remove the four (4) screws from the battery brackets and lift and remove the battery from the unit.

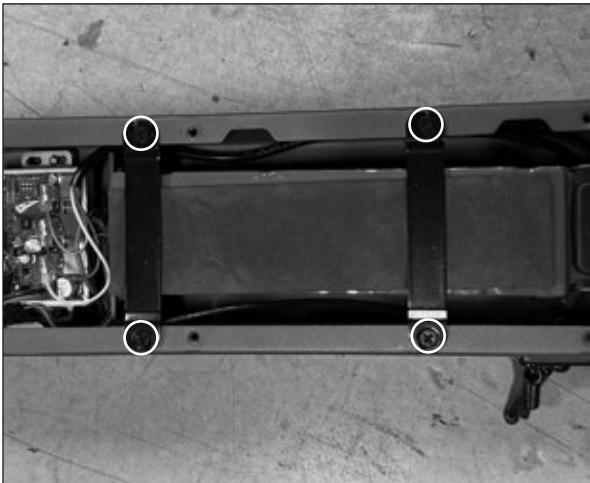

Step 4

Install the new battery, then reverse steps 1 through 3.

ATTENTION: Charge battery 5 hours before using.